
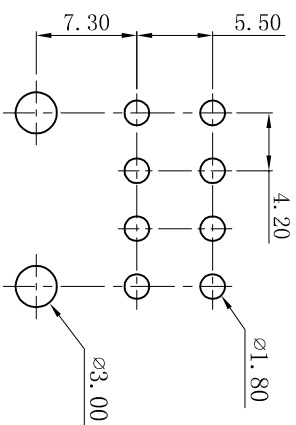
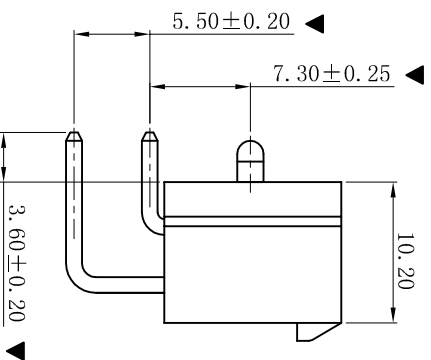
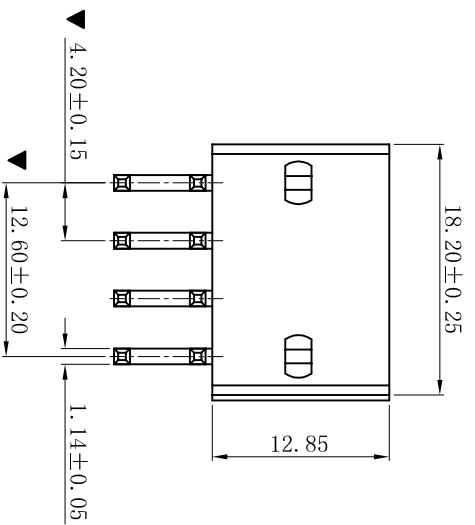


RoHS

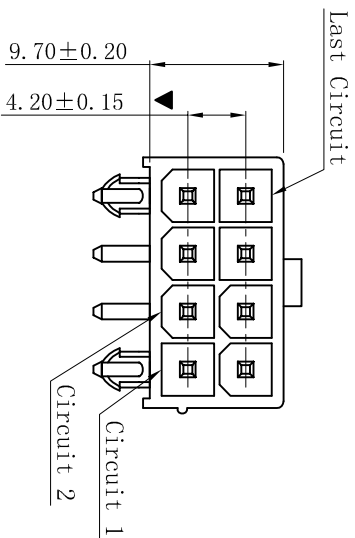

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W4202RD-2x04P-5Y3F
 - Poles: 08P
 - Housing Material: PA66 UL94V-2
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图览格式内容
B	变更图览格式内容	2013-12-27	陈雄军	新版本
A	新版本	2011-05-24	陈雄军	说明
H	版次	说明	日期	版次
1	1	DESCRIPTION	DATE	REV.

一般公差		0±0.30
GENERAL TOLERANCE:		.00±0.25
		.000±0.20
		.000±0.05
ANGLE: ±1 $^{\circ}$		
绘图/DR	陈雄军	胡进
审核/CHK	陈雄军	胡进
批准/APPRO	陈雄军	胡进
日期/DATE	2019-07-03	

<p>XYDZ[®] 东莞市祥运连接器有限公司</p> <p>Connectors Dongguan XiangYun Connectors CO., Ltd</p>		<p>投影法 Projection</p> <p>单位 Unit MM</p> <p>比例/Scale 1:1</p> <p>大小/Size A4</p> <p>页码/Sheet 1/1</p> <p>版本/Rev D</p>	<p>品名 (PART NAME)</p> <p>Mollex 4.20mm 90$^{\circ}$ 定位柱 Wafer Connector Series</p>	<p>料号 (PART NO)</p> <p>W4202RD-2x04P-5Y3F</p>	<p>状态码 C</p>
---	--	---	---	---	------------------