
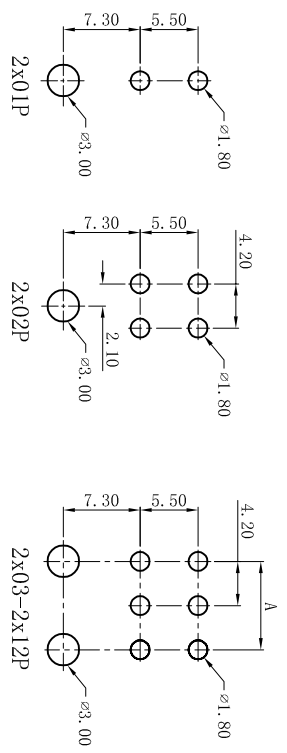
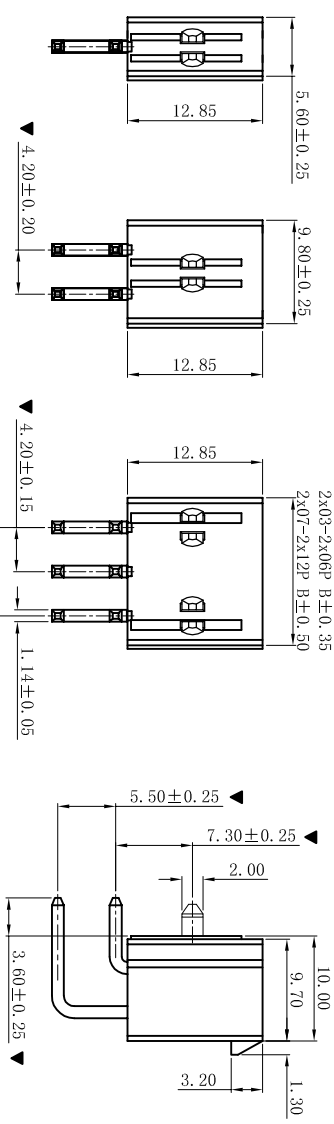
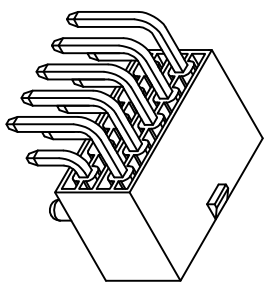


RoHS

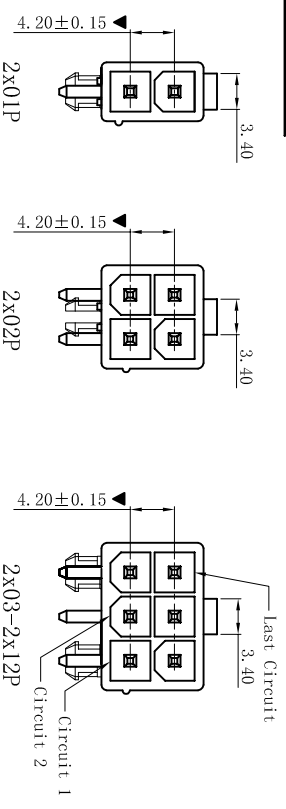


PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MMX

W4202RD-2xNP-X X-LS

ISG Material / Color
None: PA66-V2 Natural
BK: PA66-V2 Black
V0: PA66-V0 Natural
Y0BK: PA66-V0 Black
LP: LCP-V0 Natural
LPBK: LCP-V0 Black
9T: PA9T-V0 Natural
9TBK: PA9T-V0 Black
46: PA46-V0 Natural
46BK: PA46-V0 Black

Contact Finish
None: Tin-Plated
SW: Matte Tin-Plated
G: Gold-Flash
G3: 3u" Gold
G10: 10u" Gold
G15: 15u" Gold
G30: 30u" Gold

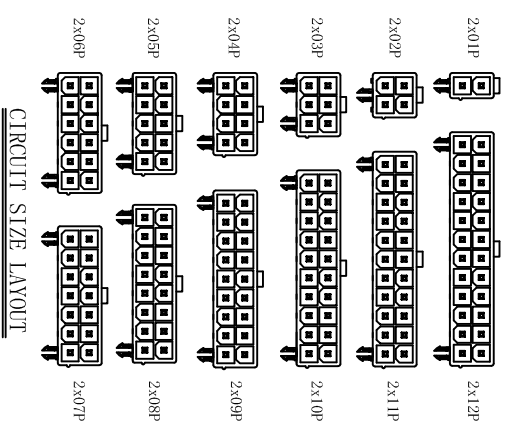

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

- ### SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C +85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202RD-2xNP-XX-LS
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
- The Dimension Marked "▼" Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE:	±1°

CONNECTORS

投影法	第一角	品名	Molex 4.20mm 90° 定位柱
Projection	1st Angle	(PART NAME)	Wafer Connector Series
单位 Unit	MM	料号	W4202RD-2xNP-XX-LS
比例/Scale	1:1	版本号	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		

D	更新图面	2019-07-03	陈雄军	承认	2019-07-03
C	修订版本	2015-11-04	陈雄军	承认	2019-07-03
B	变更图宽格式内容	2013-12-27	陈雄军	承认	2019-07-03
A	新版本	2011-05-24	陈雄军	承认	2019-07-03
H	版次	说明	日期	承认	日期/DATE
	REV.	DESCRIPTION	DATE	APPRO.	DATE

1 2 3 4 5 6 7 8 9 10