
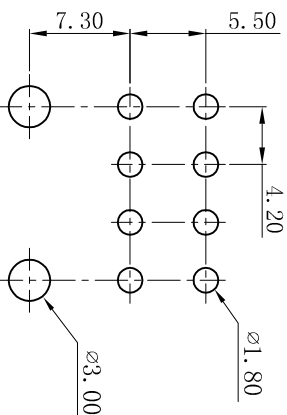
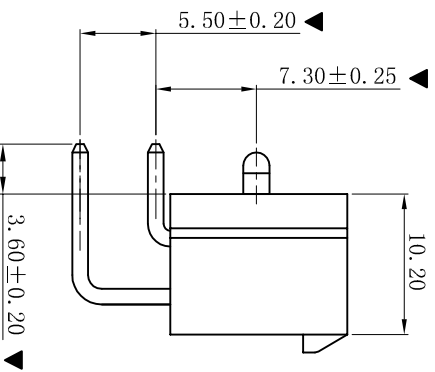
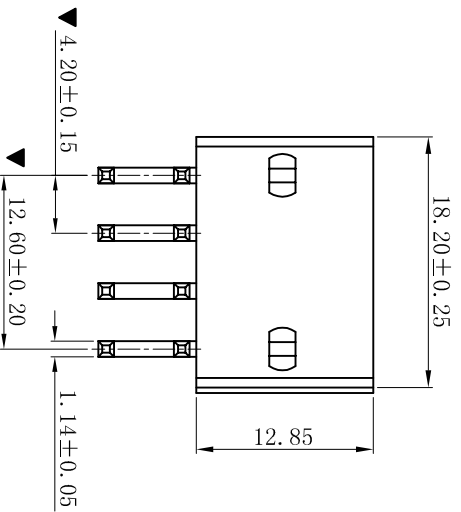


RoHS

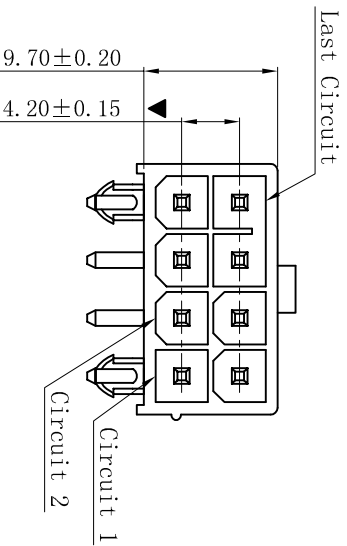

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W4202RDLKX-2x04P-BK
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRIPTION

一般公差		0±0.30
GENERAL TOLERANCE:		.00±0.25
		.000±0.05
ANGLE: ±1 $^{\circ}$		
绘图/DR	陈雄军	胡进
审核/CHECK	陈雄军	胡进
核准/APPRO	陈雄军	胡进
日期/DATE	2019-07-03	

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D
品名 (PART NAME)	Molex 4.20mm 90 $^{\circ}$ 七/八连体
料号 (PART NO)	W4202RDLKX-2x04P-BK
定位柱 Wafer Connector Series	状态码
	C