


- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20m Ω max

- WAFER
- Part No. : W4202V-1x04P-K02
 - Poles: 04P
 - Housing Material: PA66 UL94V-2
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Mates With: H4201 Single row receptacle
 - The Dimension Marked “▼” Must Be Recorded

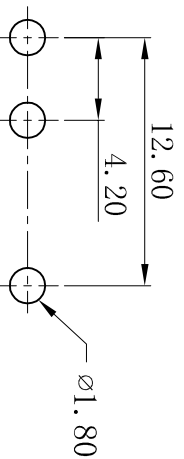

P.C.B LAYOUT

公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
ANGLE:	±1°

绘图/DR	<i>P.P. Dawu</i>
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

更新图面	2019-07-03	<i>P.P. Dawu</i>	承认
新版本	2019-01-09	<i>P.P. Dawu</i>	承认
说明	日期	承认	
DESCRIPTION	DATE:	APPRO.	

XYDZ® 东莞市祥运连接器有限公司			
Connectors			
Dongguan XiangYun Connectors CO., Ltd			
投影法	投影法	品名	Mollex 4.20mm 180° Wafer
单位 Unit	MM	(PART NAME)	Connector Series
比例/Scale	1:1	料号	W4202V-1x04P-K02
大小/Size	A4	(PART NO)	
页码/SHEET	1/1		
版本/Rev	B		
		状态码	C