
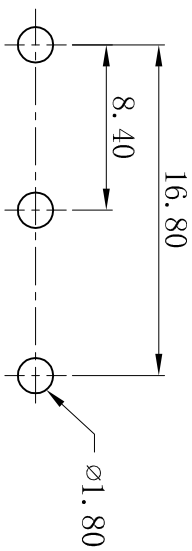
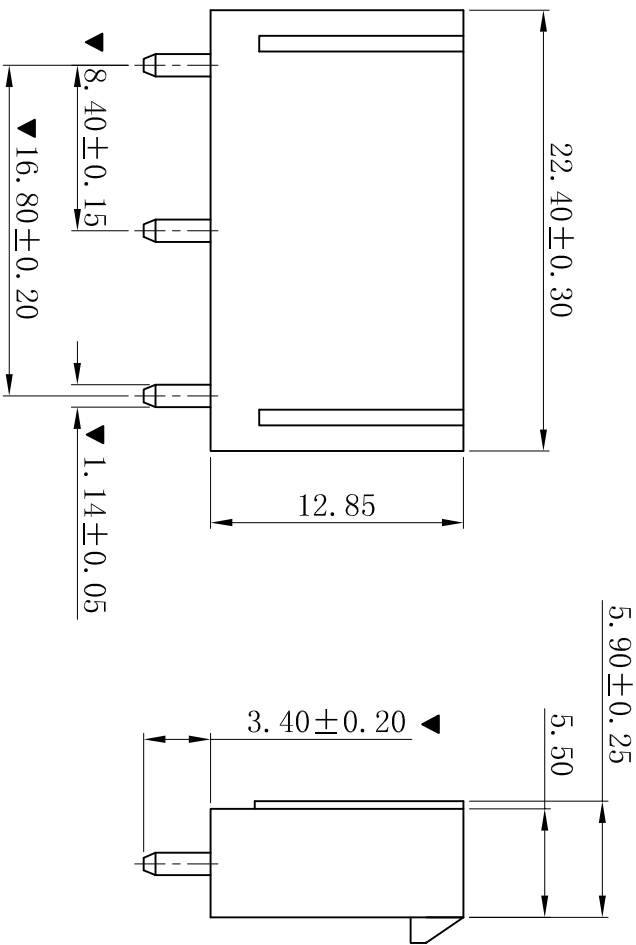


RoHS

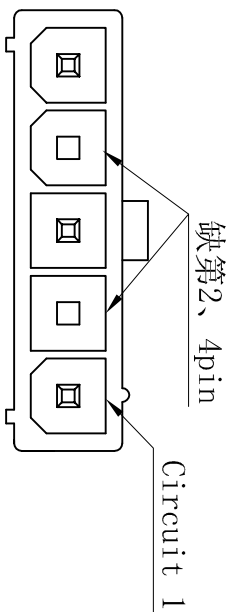

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W4202V-1x05P-Q2P
 - Poles: 05P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 Single row receptacle
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03		陈雄军		2019-07-03		0±0.30 -0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 单位 Unit MM 比例/Scale 1:1 大小/Size A4 页码/Sheet 1/1 版本/Rev D		品名 (PART NAME) Molex 4.20mm 180° Wafer Connector Series		料号 (PART NO) W4202V-1x05P-Q2P		状态码 C	
修訂版本		2015-11-04		陈雄军		2019-07-03		绘图/DR 陈雄军 审核/CHECK 陈雄军 批准/APPRO 胡进		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd							
变更图宽格式内容		2013-12-27		陈雄军													
新版本		2011-05-24		陈雄军													
说明		日期		承认													
DESCRPTION		DATE		APPRO													
版次		日期		承认													
REV.		DATE		APPRO													