
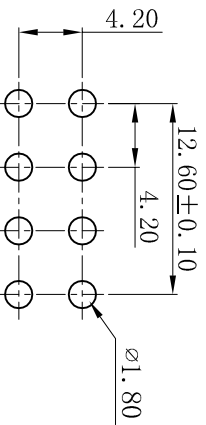
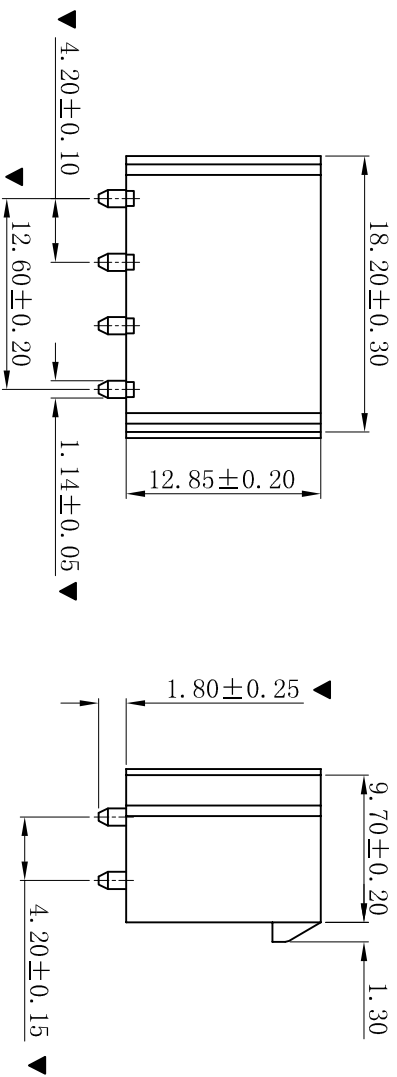


ROHS

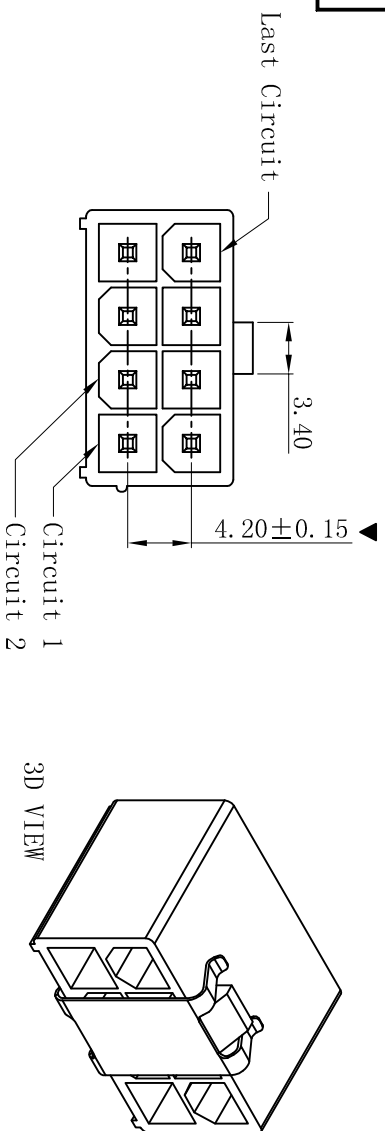


P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

3D VIEW

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 11A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202V-2x04P-1P-WL1.8-H
- Poles: 08P
- Housing Material: LCP UL94V-0, Natural color.
- Pin Material: High Conductivity Copper
- Contact Area Plating: Tin-Plated
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

WITH CAP VIEW

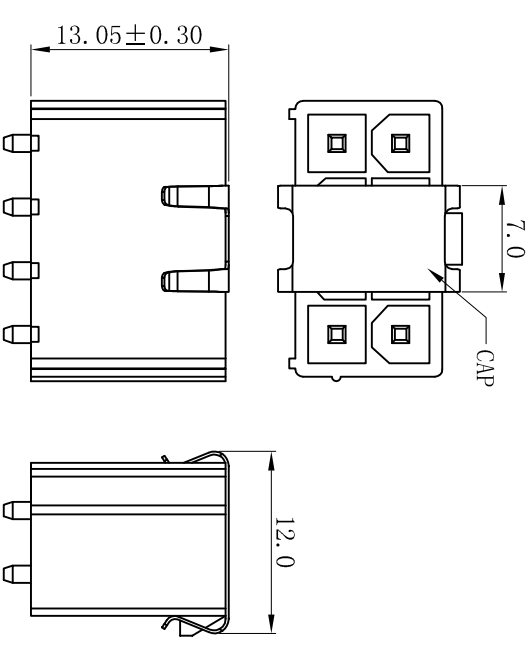

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	B

品名 (PART NAME)	Molex 4.20mm 180° Wafer Connector Series
料号 (PART NO)	W4202V-2x04P-1P-WL1.8-H

更新图档	2019-07-03	段平会	承认
新版本	2018-08-14		
说明	日期	日期	日期
DESCRIPTION	DATE	DATE	DATE

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----