
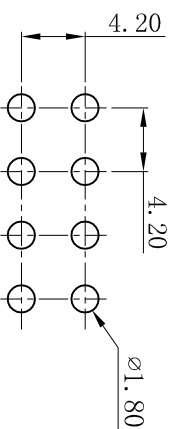
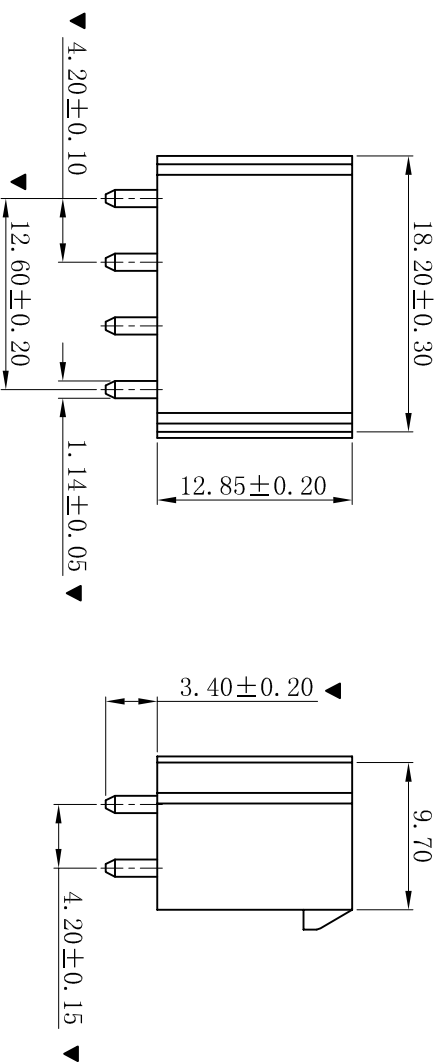


RoHS

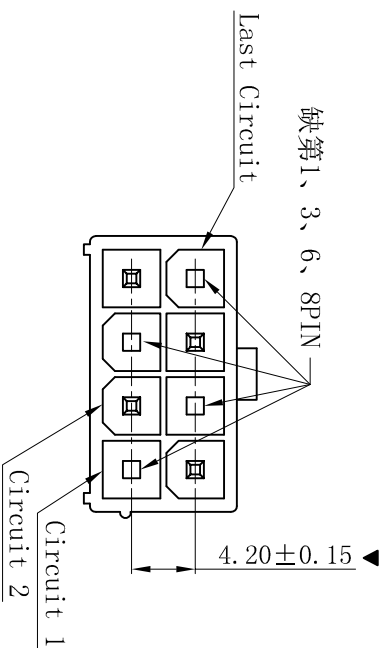

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage ratings: 600V AC, DC
 - Current ratings: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W4202V-2x04P-Q4P
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked “▼” Must Be Recorded

D	更新图档	2019-07-03	陈雄军	更新图档						
C	修订版本	2015-11-04	陈雄军	修订版本						
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容						
A	新版本	2011-05-24	陈雄军	新版本						
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.						
1	1	2	3	4	5	6	7	8	9	10

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/Sheet
1/1

版本/Rev
D

品名
(PART NAME)
Molex 4.20mm 180° Wafer

料号
(PART NO)
W4202V-2x04P-Q4P

状态码
C