
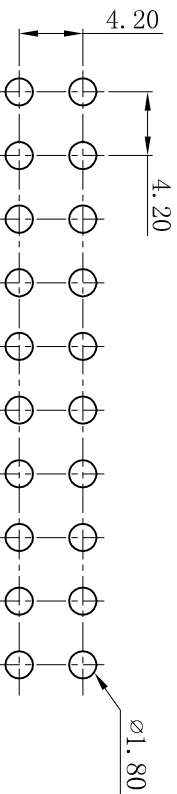
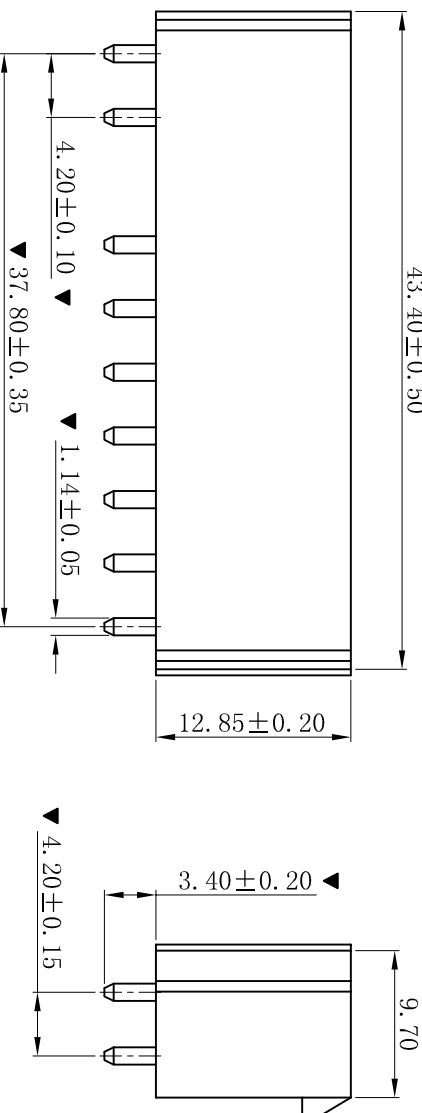


RoHS

Last Circuit

缺第3、8、9、12、14、18PIN

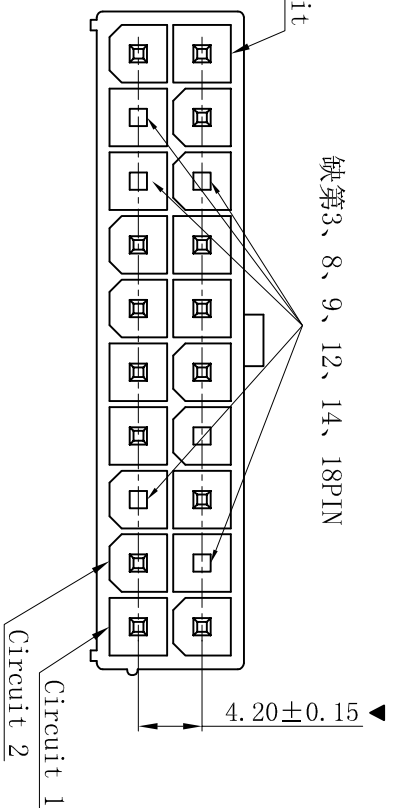

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W4202V-2x10P-Q6P
- Poles: 20P
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

更新图档		2019-07-03	陈雄军		陈雄军		2019-07-03		D	
修订版本		2015-11-04	陈雄军		陈雄军		2015-11-04		D	
变更图宽格式内容		2013-12-27	陈雄军		陈雄军		2013-12-27		D	
新版本		2011-05-24	陈雄军		陈雄军		2011-05-24		D	
说明		日期	承认		承认		日期		D	
DESCRPTION		DATE	APPRO.		APPRO.		DATE		D	
版次		1	1		1		1		1	
REV.		1	1		1		1		1	

一般公差		0±0.30	陈雄军		陈雄军		2019-07-03		D	
GENERAL TOLERANCE:		.00±0.25	陈雄军		陈雄军		2019-07-03		D	
		.000±0.20	胡进		胡进		2019-07-03		D	
		ANGLE: ±1°							D	

投影法		第一角	Mollex 4.20mm 180° Wafer		Mollex 4.20mm 180° Wafer		W4202V-2x10P-Q6P		C	
Connectors		第一角	Connector Series		Connector Series		W4202V-2x10P-Q6P		C	
单位 Unit		MM	(PART NAME)		(PART NAME)		(PART NO)		C	
比例/Scale		1:1							C	
大小/Size		A4							C	
页码/SHEET		1/1							C	
版本/Rev		D							C	

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

Mollex 4.20mm 180° Wafer  
Connector Series

W4202V-2x10P-Q6P

状态码