

W4202V-2xNP-XX X-GDT

INSULATOR / COLOR






None:PA66-V2 Natural  
 BK:PA66-V2 Black  
 V0:PA66-V0 Natural  
 V0BK:PA66-V0 Black  
 LP: LCP-V0 Natural  
 LPBK: LCP-V0 Black  
 9T:PA9T-V0 Natural  
 9TBK:PA9T-V0 Black  
 46B:PA46-V0 Natural  
 46BK:PA46-V0 Black  
 6T:PA6T-V0 Natural  
 6TBK:PA6T-V0 Black

CONTACT FINISH

None:Tin-Plated  
 SW:Matte Tin-Plated  
 G:Gold-Flash  
 G3:3u" Gold  
 G10:10u" Gold  
 G15:15u" Gold  
 G30:30u" Gold

GDT: 高导电材质

- ### SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance:1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202V-2xNP-XX-GDT
  - Poles : 02-24P
  - Housing Material: PA66 UL94V-2 or UL94V-0
  - Pin Material: High Conductivity Copper
  - Contact Area Plating: Tin-Plated or Gold-Flash
  - PIN L=1.14x12.70
  - The Dimension Marked "▲" Must Be Recorded

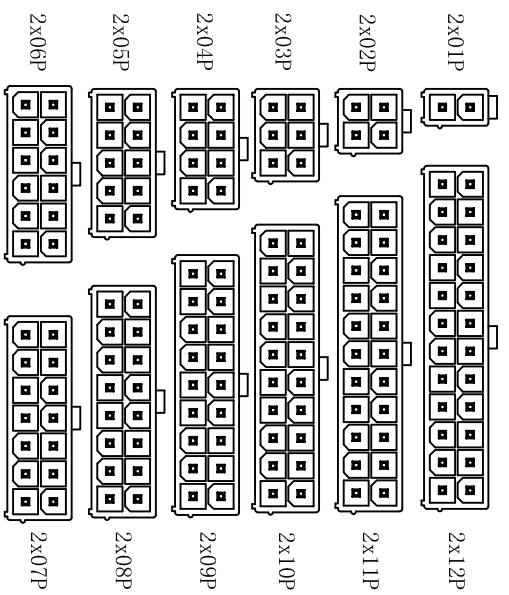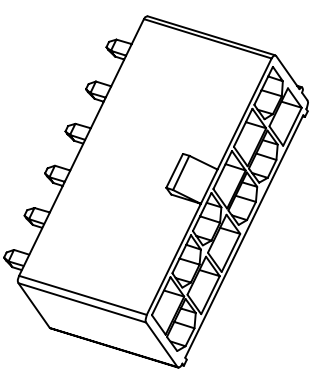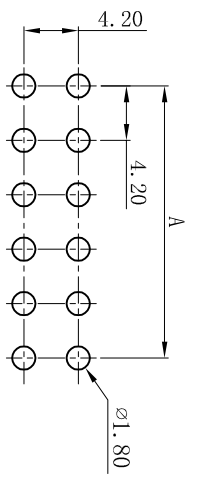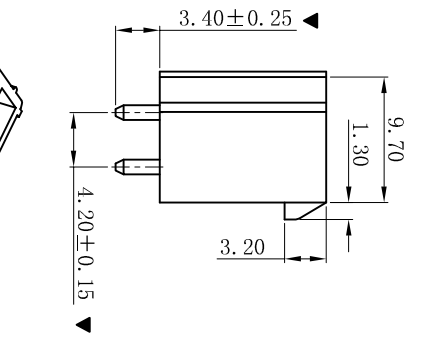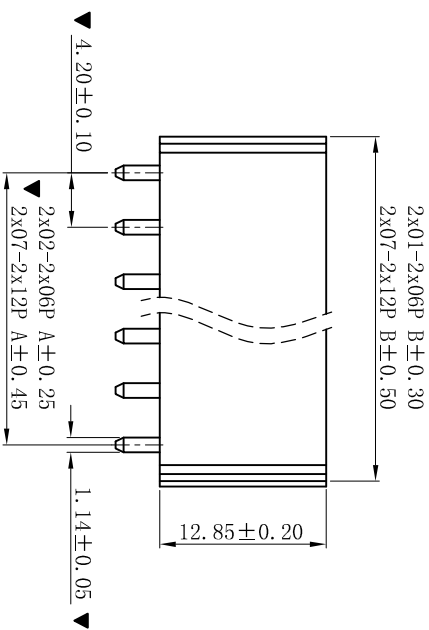

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

**XYDZ® 东莞市祥运连接器有限公司**  
 DongGuan XiangYun Connectors CO., Ltd

更新图画		2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05	投影法 Projection	品名 (PART NAME)	Molex 4.20mm 180° Wafer	料号 (PART NO.)	W4202V-2xNP-XX-GDT	状态码 C
修订版本		2015-11-04	陈雄军	ANGLE: ±1°		单位 Unit	Connector Series				
变更图宽格式内容		2013-12-27	陈雄军	绘图/DR		比例/Scale	Molex 4.20mm 180° Wafer				
新版本		2011-05-24	陈雄军	审核/CHECK		大小/SIZE	Molex 4.20mm 180° Wafer				
说明 DISCRIPTION		日期 DATE.	承认 APPRO.	核准/APPRO	日期/DATE	页码/SHEET	Molex 4.20mm 180° Wafer				
版本 REV.				日期/DATE	2019-07-03	版本/Rev	Molex 4.20mm 180° Wafer				