



RoHS

W4202V-2xNP-XX

INSTULATOR / COLOR
None: Tin-Plated
BK: Pa66-V2 Black
V0: Pa66-V0 Natural
V0BK: Pa66-V0 Black
LP: LCP-V0 Natural
LPBK: LCP-V0 Black
9T: PA9T-V0 Natural
9TBK: PA9T-V0 Black
46: PA46-V0 Natural
46BK: PA46-V0 Black
6T: PA6T-V0 Natural
6TBK: PA6T-V0 Black

CONTACT FINISH
None: Tin-Plated
SW: Matte Tin-Plated
G: Gold-Flash
G3: 3u" Gold
G10: 10u" Gold
G15: 15u" Gold
G30: 30u" Gold

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202V-2xNP-XX
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - PIN L=1.14x12.70
 - The Dimension Marked "▲" Must Be Recorded

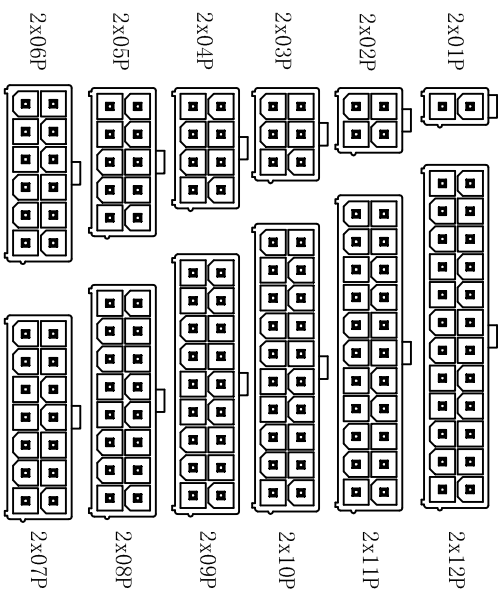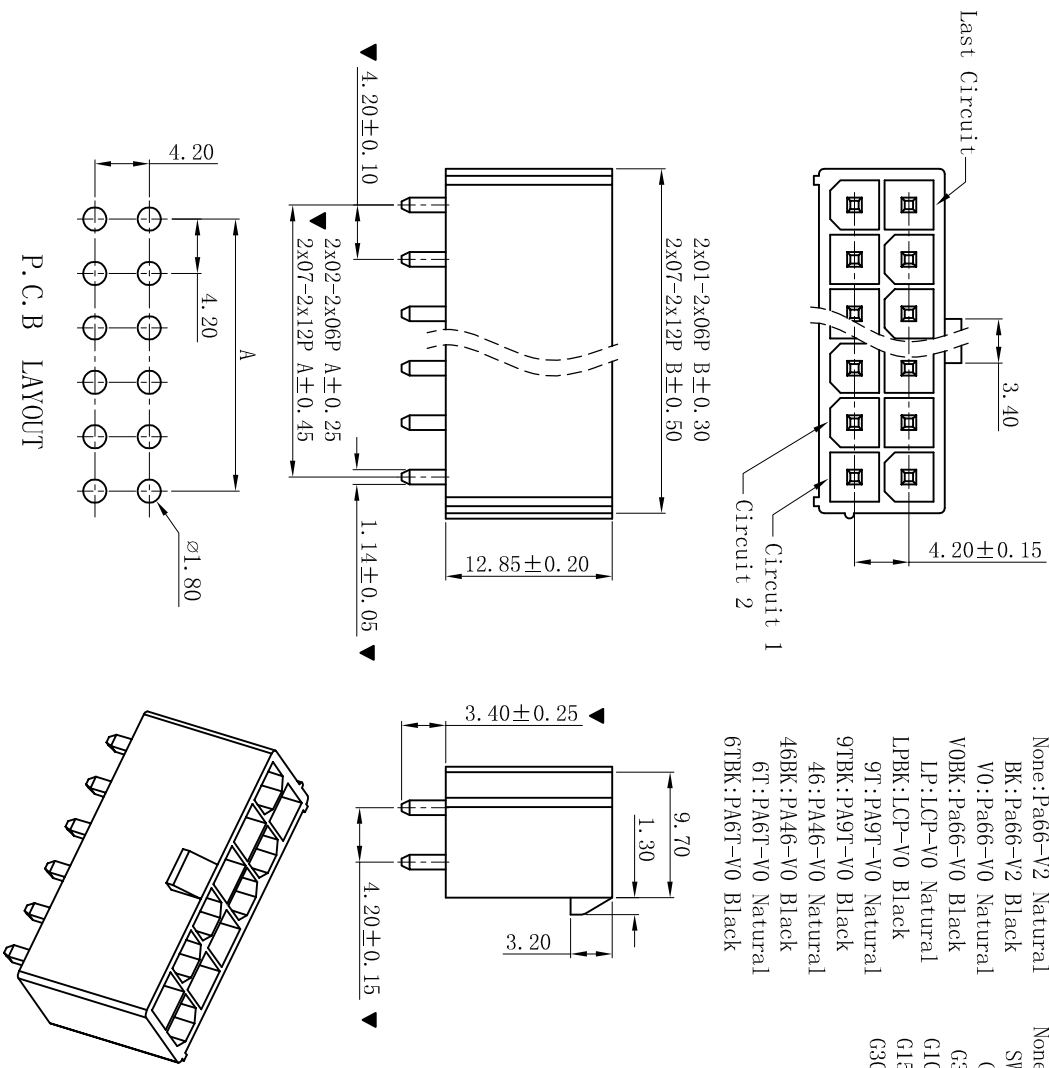

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

P. C. B LAYOUT

D	更新图画	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE
1	1	2	3
2	3	4	5
6	7	8	9
10			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 -0.0±0.25 .000±0.05	角度: ±1°
绘图/DR	陈雄军	审核/CHK
批准/APPRO	胡进	日期/DATE
投影法 Projection	第一角	单位 Unit
比例/Scale	1:1	大小/Size
页码/SHEET	1/1	版本/New
品名 (PART NAME)	Molex 4.20mm 180° Wafer	料号 (PART NO)
连接器系列 Connector Series	W4202V-2xNP-XX	状态码