


RoHS

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VCB-2x04P-4F4Y-BK
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

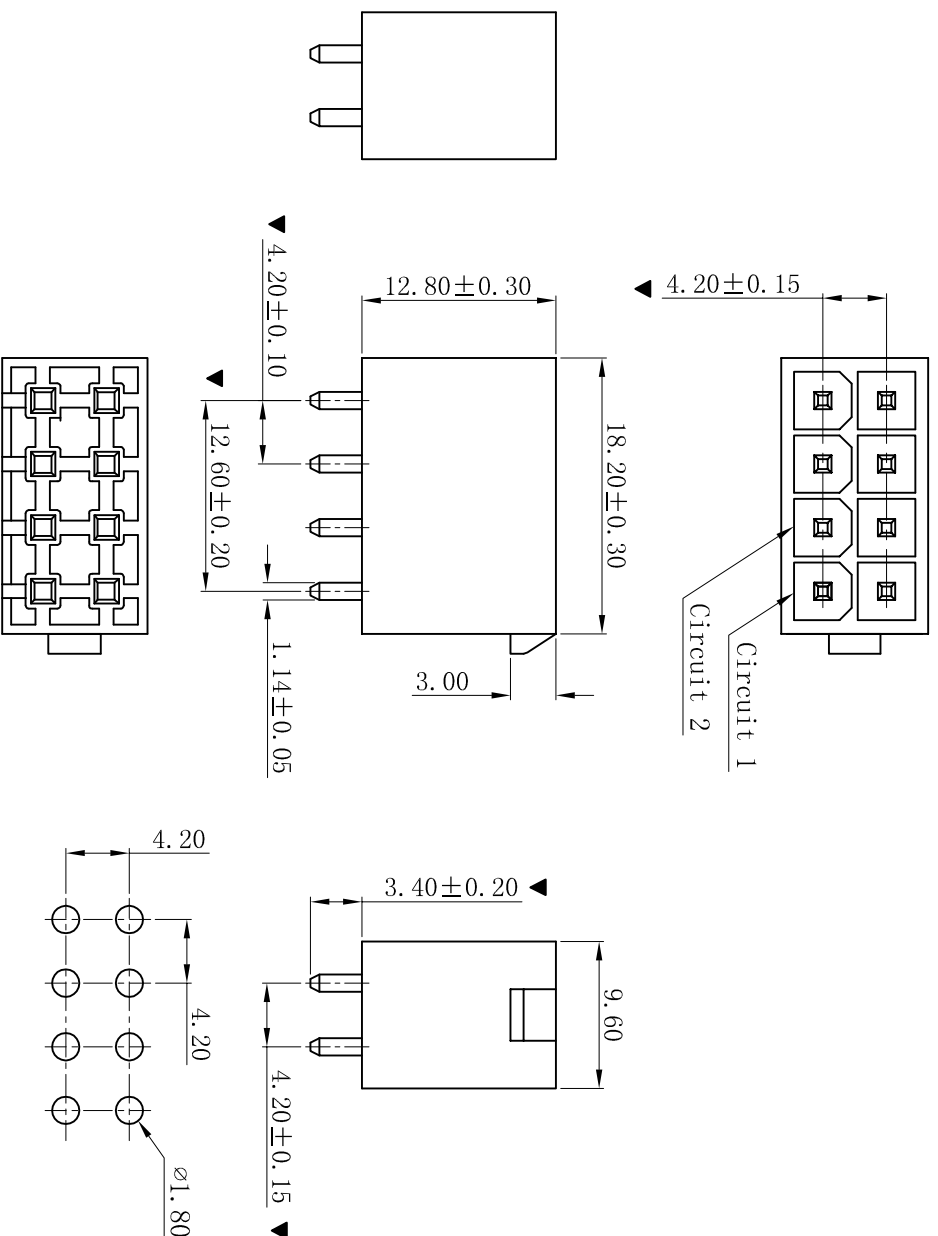

P.C.B LAYOUT

更新图档		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd		品名 (PART NAME) Molex 4.20mm 180° 侧卡特殊孔位 4P4Y Wafer Connector Series		料号 (PART NO) W4202VCB-2x04P-4F4Y-BK		状态码 C	
修订版本		2015-11-04		陈雄军		绘图/DR		投影法 Projection 第一角		单位 Unit MM		大小/SIZE A4		页码/Sheet 1/1	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		比例/Scale 1:1		大小/SIZE A4		页码/Sheet 1/1		版本/Rev D	
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		大小/SIZE A4		页码/Sheet 1/1		版本/Rev D	
说明		2011-05-24		陈雄军		日期/DATE		2019-07-03		大小/SIZE A4		页码/Sheet 1/1		版本/Rev D	
版次 REV.		1		1		日期/DATE		2019-07-03		大小/SIZE A4		页码/Sheet 1/1		版本/Rev D	
DESCRIPTION		3		3		日期/DATE		2019-07-03		大小/SIZE A4		页码/Sheet 1/1		版本/Rev D	