
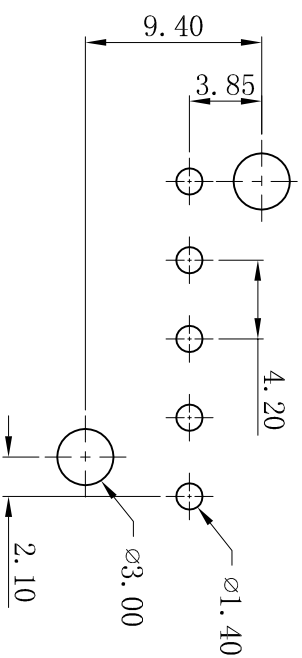
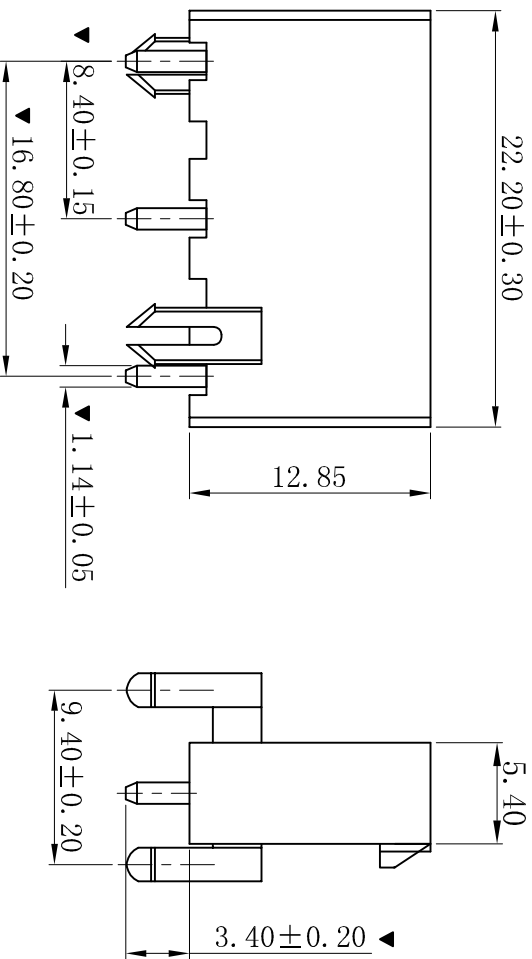


RoHS

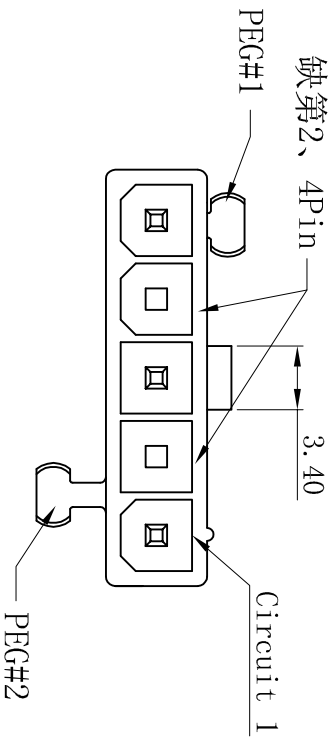

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W4202VD2-1x05P-BK-Q2P
- Poles: 05P
- Housing Material: PA66 UL94V-2 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- Mates With: H4201 Single row receptacle
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.20 ANGLE: ±1°		绘图/DR 审核/CHKC 核准/APPRO		日期/DATE	
修订版本		2015-11-04	陈雄军	0±0.30 .00±0.25 .000±0.20 ANGLE: ±1°		陈雄军		2019-07-03	
变更图宽格式内容		2013-12-27	陈雄军	PROJECTOR 单位 Unit 比例/Scale 大小/Size		胡进		2019-07-03	
新版本		2011-05-24	陈雄军	MM		1:1		A4	
说明		承认		页码/SHEET		1/1		料号 (PART NO)	
DESCRPTION		APPRO.		版本/Rev		D		W4202VD2-1x05P-BK-Q2P	
版次 REV.		1		状态码		C			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

品名
(PART NAME)
Molex 4.20mm 180° 两边定位柱
Wafer Connector Series