



RoHS

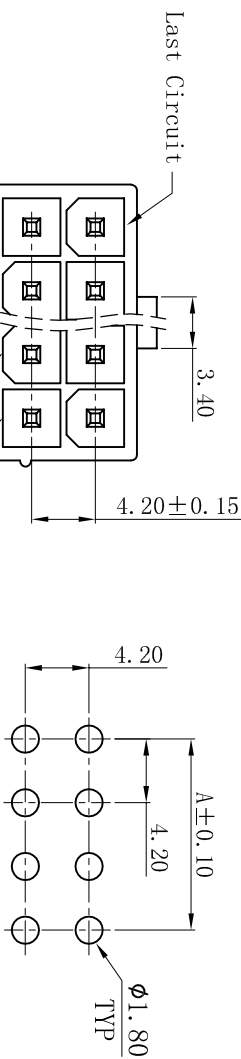



P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm



3D VIEW

SPECIFICATIONS

- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VJ-2xNP-G3TR
 - Poles: 02-24P
 - Housing Material: PA66 UL94V-2 Red
 - Pin Material: Brass
 - Contact Area Plating: Gold-Plated
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▼" Must Be Recorded

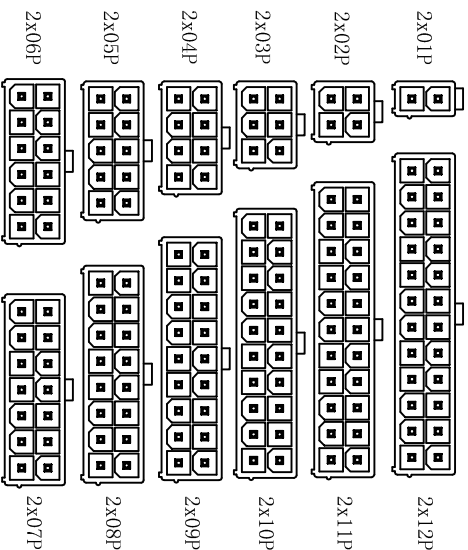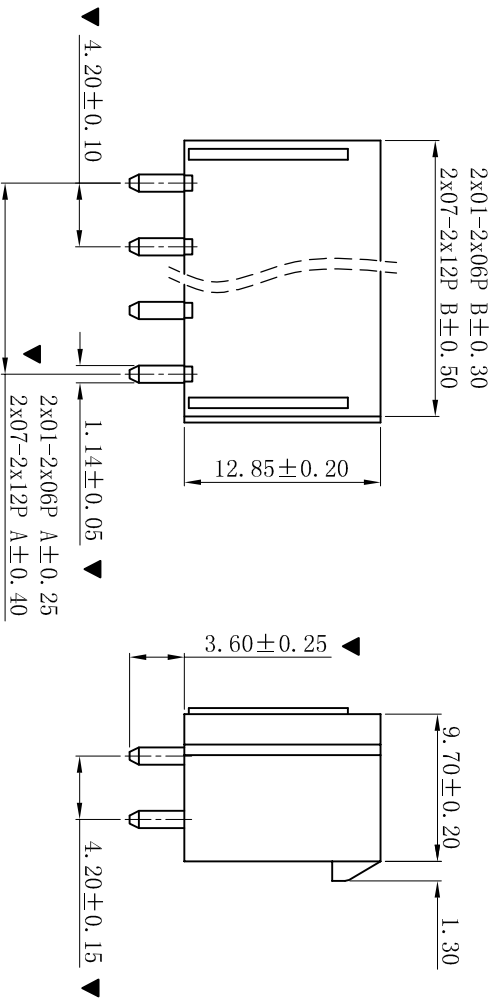

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	—	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

绘图/DR	2019-07-03	2019-07-03
审核/CHECK	陈雄军	胡进
批准/APPRO	胡进	胡进
日期/DATE	2019-07-03	2019-07-03

投影法 Projection: 第一角法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: B

更新图面
新版本

2019-07-03

2019-04-12

PPZ Design

PPZ Design

陈雄军

胡进

胡进

料号 (PART NAME): W4202VJ-2xNP-G3TR

状态码: C

版次 REV. 1

说明 DESCRIPTION

日期 DATE

承认 APPRO.

日期/DATE

2019-07-03

胡进

胡进

胡进

料号 (PART NO): W4202VJ-2xNP-G3TR

状态码: C