

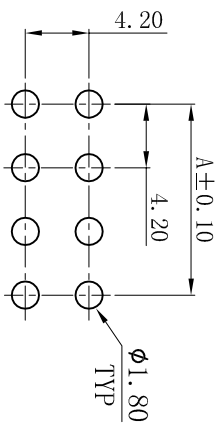


RoHS

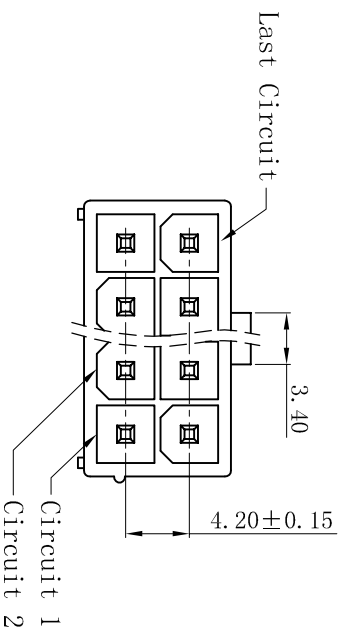

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm





■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W4202VJ-2xNP-GTR
- Poles: 02-24P
- Housing Material: PA66 UL94V-2 Red
- Pin Material: Brass
- Contact Area Plating: Gold(G/F)-Plated
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

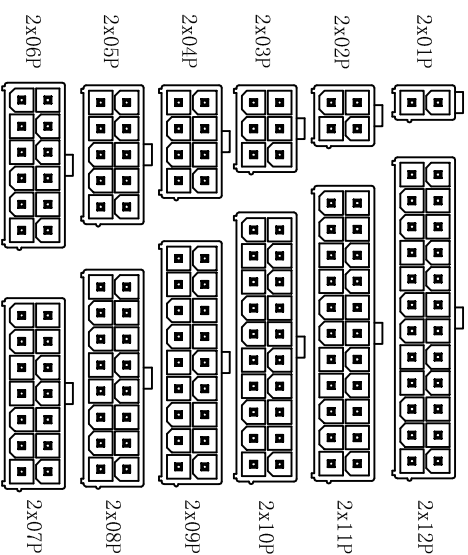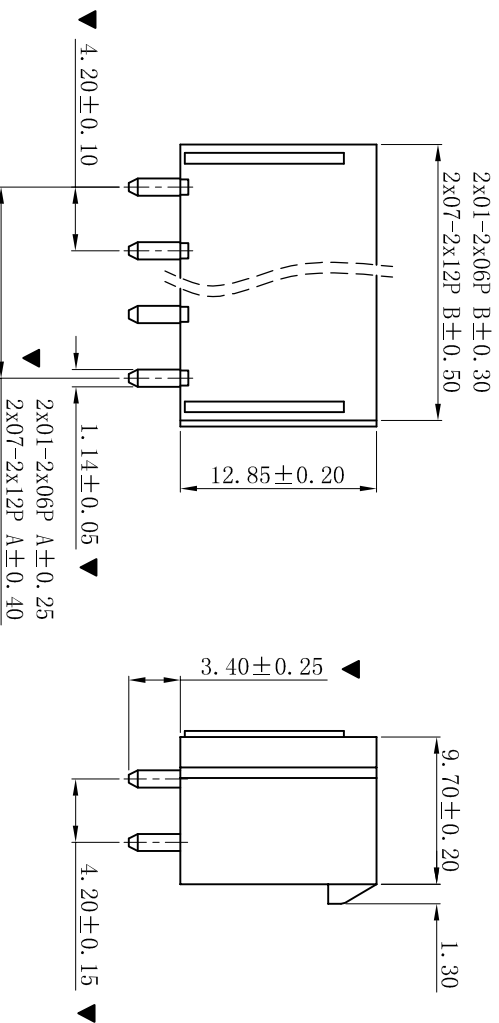

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

CIRCUIT SIZE LAYOUT

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors

Molex 4.20mm 180° 加胶半杠
Wafer Connector Series

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

投影法
Projection

品名
(PART NAME)

绘图/DR

单位 Unit

料号
(PART NO)

审核/CHECK

比例/Scale

状态码

批准/APPRO

页码/SHEET

版次
REV.

日期/DATE

版本/Rev

说明
DESCRIPTION

更新图面	2019-07-03	PPZ, Duann	承认	2019-07-03	胡 进	1/1	W4202VJ-2xNP-GTR	C
由原04P图变更为系列图	2019-04-12	PPZ, Duann	承认	2019-04-12	陈雄军	1:1		
新版本	2019-03-25	PPZ, Duann	承认	2019-03-25	胡 进	1/1		