

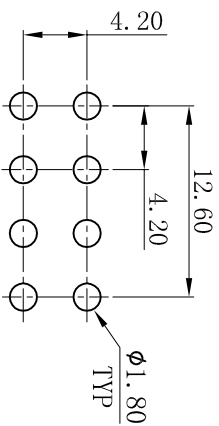
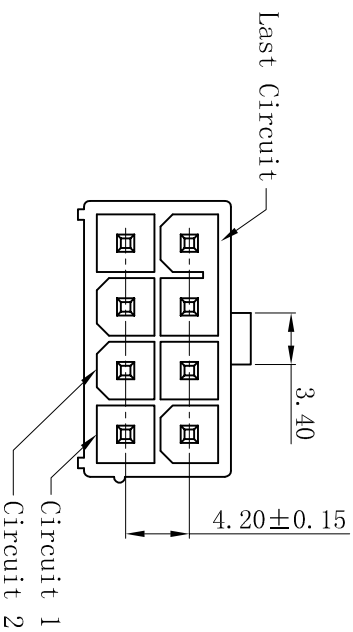



RoHS

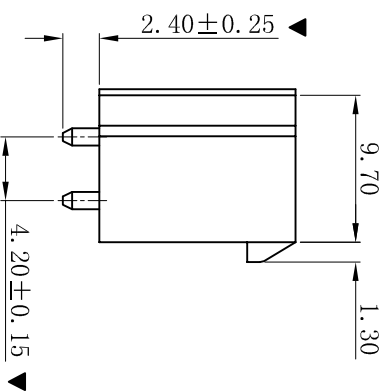

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

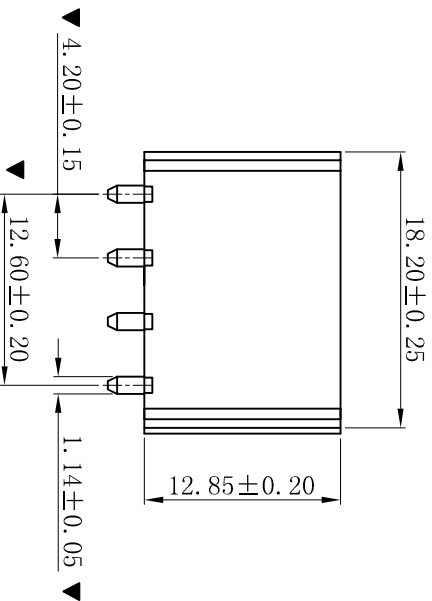

3D VIEW

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W4202V1K-2x04P-BK-WL2.4
- Poles: 08P
- Housing Material: PA66 UL94V-2, Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded
- Pin L: 1.14x12.7mm

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°
绘图/DR	P.P. Duan
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

投影法 Projection		品名 (PART NAME)
单位 Unit	MM	Molex 4.20mm 180° Wafer
比例/Scale	1:1	Connector Series
大小/Size	A4	
页码/SHEET	1/1	
版本/Rev	B	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

更新图面 新版本	2019-07-03	P.P. Duan	
说明 DESCRIPTION	2019-04-20	P.P. Duan	
版次 REV.		承认 APPRO.	

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----