

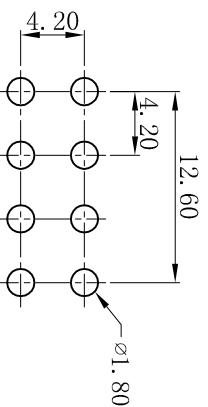
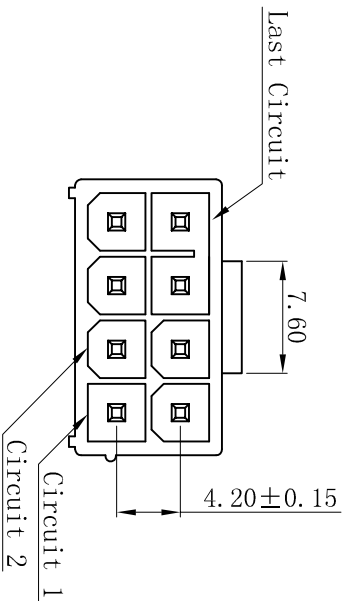



RoHS

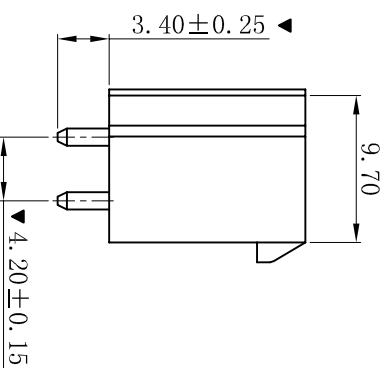

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

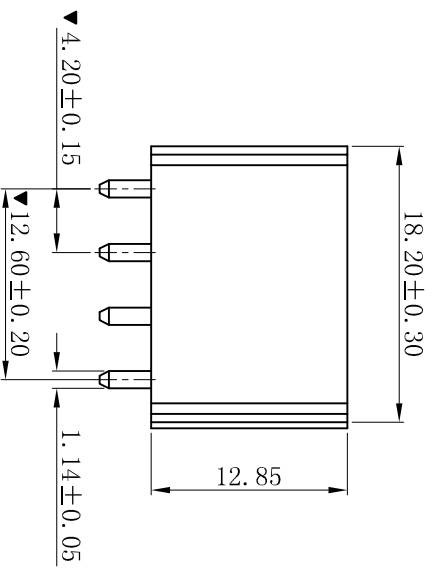

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VLK-2x04P-BKG-ZP0.5
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-Plated
 - The Dimension Marked “▼” Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

Connectors
MoIex 4.20mm 180° Wafer
Connector Series

更新图面 新图面		2019-07-03		PPZ Duan		PPZ Duan		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		MoIex 4.20mm 180° Wafer Connector Series	
版次 REV.		说明 DESCRIPTION		日期 DATE		承认 APPRO.		ANGLE: ±1°		单位 Unit		料号 (PART NO)		W4202VLK-2x04P-BKG-ZP0.5	
A		A		2019-03-25		PPZ Duan		0.50±0.20		MM		W4202VLK-2x04P-BKG-ZP0.5		C	
B		B		2019-07-03		PPZ Duan		15.70±0.10		1:1		W4202VLK-2x04P-BKG-ZP0.5		C	
H		H		2019-03-25		PPZ Duan		1.14±0.05		A4		W4202VLK-2x04P-BKG-ZP0.5		C	
G		G		2019-03-25		PPZ Duan		4.20±0.15		1/1		W4202VLK-2x04P-BKG-ZP0.5		C	
F		F		2019-03-25		PPZ Duan		12.60±0.20		B		W4202VLK-2x04P-BKG-ZP0.5		C	
E		E		2019-03-25		PPZ Duan		18.20±0.30		B		W4202VLK-2x04P-BKG-ZP0.5		C	
D		D		2019-03-25		PPZ Duan		12.85		B		W4202VLK-2x04P-BKG-ZP0.5		C	
C		C		2019-03-25		PPZ Duan		7.60		B		W4202VLK-2x04P-BKG-ZP0.5		C	
B		B		2019-03-25		PPZ Duan		4.20±0.15		B		W4202VLK-2x04P-BKG-ZP0.5		C	
A		A		2019-03-25		PPZ Duan		4.20±0.15		B		W4202VLK-2x04P-BKG-ZP0.5		C	