

P.C.B LAYOUT

SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

WAFER

- Part No. : W4202VT-2xNP-9TSW-WL2.0
- Poles : 02-24P
- Housing Material: PA9T UL94V-0 Beige
- Pin Material: Brass
- Contact Area Plating: Matte Tin-Plated(雾锡)
- Tin Thickness=100u"Nickel Thickness=50u"
- Mates With: H4201 dual row receptacle

● The Dimension Marked "▼" Must Be Recorded

备注：此款端子表面电镀为镀雾锡，在组装过程中端子表面有点刮痕属正常现象。

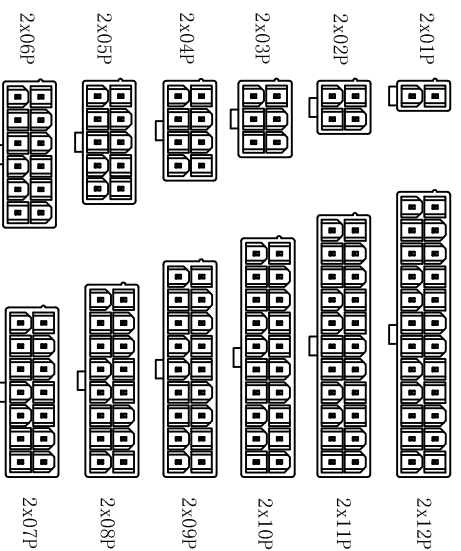

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	---	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

一般公差 GENERAL TOLERANCE:	0±0.30 -0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Molex 4.20mm 180° 空芯
Wafer Connector Series

更新图面	2019-07-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军

说明
DESCRIPTION

日期/DATE	2019-07-03
---------	------------

料号 (PART NO)	W4202VT-2xNP-9TSW-WL2.0
状态码	C

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----