


RoHS





W4202VT-2xNP-XX

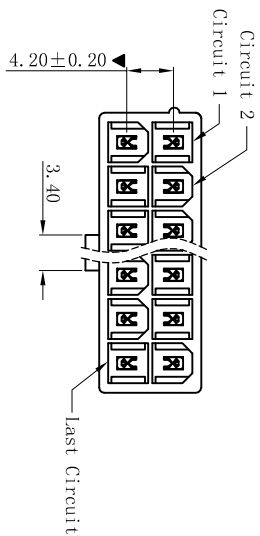

HSG: Material/Color  
 None:PA66-V2 Natural  
 BK:PA66-V2 Black  
 V0:PA66-V0 Natural  
 V0BK:PA66-V0 Black  
 LP:ICP-V0 Natural  
 LPBK:ICP-V0 Black  
 91:PA9T-V0 Natural  
 91BK:PA9T-V0 Black  
 46:PA46-V0 Natural  
 46BK:PA46-V0 Black  
 61:PA61-V0 Natural  
 61BK:PA61-V0 Black

Contact Finish  
 None: Tin-Plated  
 Tin Thickness=100μ"  
 Nickel Thickness=50μ"  
 S: Matte Tin-Plated  
 G: Gold-Flash  
 G3:30" Gold  
 G10:10" Gold  
 G15:15" Gold  
 G30:30" Gold

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W4202VT-2xNP-XX
  - Poles : 02-24P
  - Housing Material: PA66 UL94V-2 or UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated or Gold-Flash
  - Mates With: H4201 dual row receptacle
  - The Dimension Marked "▲" Must Be Recorded

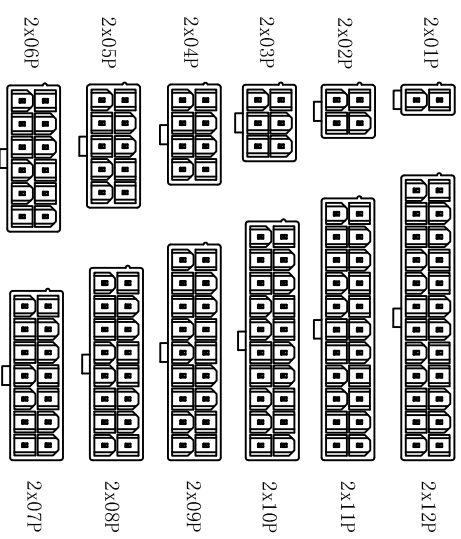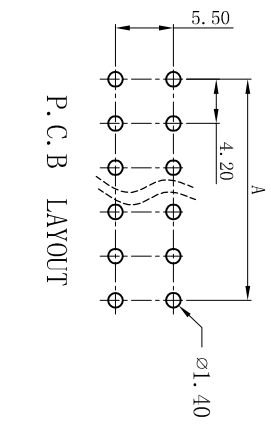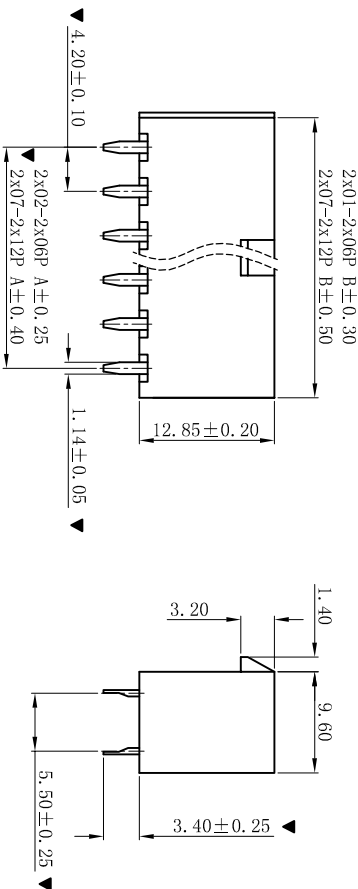

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions(mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

D	更新图画	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.		


一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE:	±1°

绘图/DR	陈雄军	审核/CHECK	陈雄军	日期/DATE	2019-07-03
批准/APPRO	胡进	承认	陈雄军	日期/DATE	2011-05-24


**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角	品名 (PART NAME)	Molex 4.20mm 180° 空芯
单位 Unit	MM	料号 (PART NO)	W4202VT-2xNP-XX
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/Sheet	1/1		
版本/Rev	D		



RoHS




产品

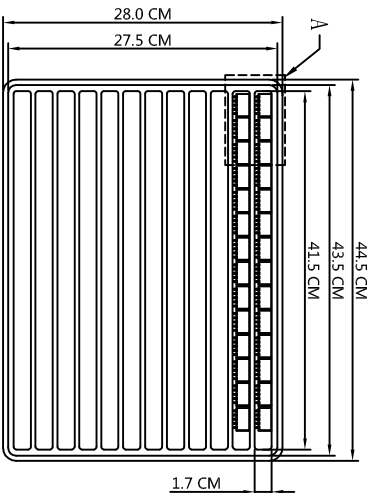

吸塑盘下盖(12格)

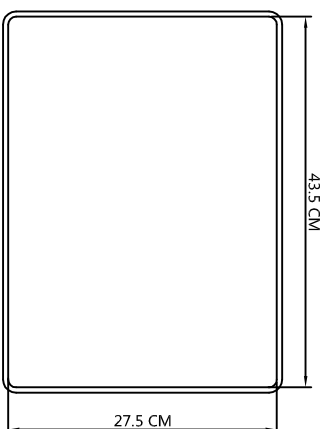


吸塑盘上盖

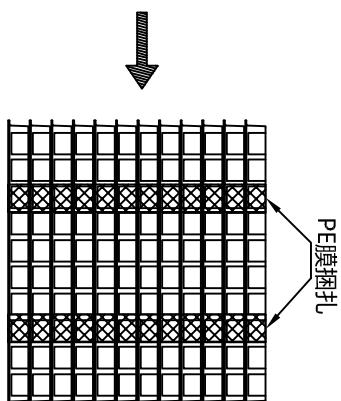


最上层盖一上盖


PIN/位	PCS/盘	层/箱	PCS/箱
2x1P	852	20	17040
2x2P	492	20	9840
2x3P	348	20	6960
2x4P	264	20	5280
2x5P	216	20	4320
2x6P	180	20	3600
2x7P	156	20	3120
2x8P	132	20	2640
2x9P	120	20	2400
2x10P	108	20	2160
2x11P	96	20	1920
2x12P	84	20	1680

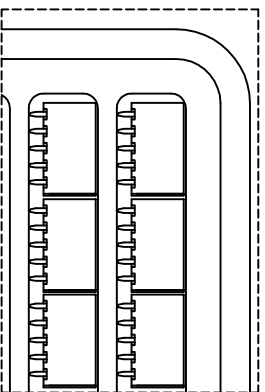

局部放大图A

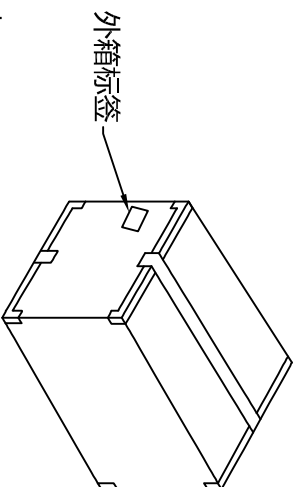

外箱标签

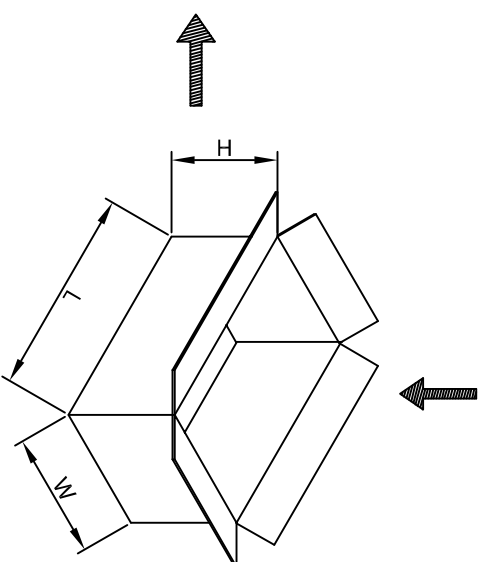

封箱(I字形)

外箱规格:  
45.0(L)x29.0(W)x25.0(H)CM

**包装说明:**  
**步骤1:** 将产品按要求整齐摆放入吸塑盘下盖内。  
 在层叠起来,方向需一致。  
**步骤2:** 按一箱层叠20层叠起来,最上层盖一上盖。  
 然后用PE膜扎住,为一箱,放入纸箱,封箱,贴外箱标签。  
**注:** 不满一箱时,需以填充物填充,不可有晃动。

PIN/位	PCS/盘	层/箱	PCS/箱
2x1P	852	20	17040
2x2P	492	20	9840
2x3P	348	20	6960
2x4P	264	20	5280
2x5P	216	20	4320
2x6P	180	20	3600
2x7P	156	20	3120
2x8P	132	20	2640
2x9P	120	20	2400
2x10P	108	20	2160
2x11P	96	20	1920
2x12P	84	20	1680

版本号	说明	日期	承认
A	新版本	2019-06-15	PPA Duca

版本号	说明	日期	承认
Rev.	DESCRIPTION	DATE	APPRO.

一般公差	角度
GENERAL TOLERANCE:	ANGLE: ±1°
±0.50	
±0.40	
±0.30	
±0.10	

<b>XYDZ® 东莞市祥运连接器有限公司</b> Dongguan XiangYun Connectors CO., Ltd		投影法 Projection 第一角法 First Angle Projection	
单位 Unit MM		比例/Scale 1:1	
审核/CHK 陈雄军		日期/DATE 2019-06-15	
批准/APP 胡进		日期/DATE 2019-06-15	
品名 (PART NAME) Molex4.20mm 2xNP 180° 空芯 Packaging Specification		料号 (PART NO) W4202VT-2xNP	
状态码 C			