



RoHS


W4202VTD-2x03P-X X-P2

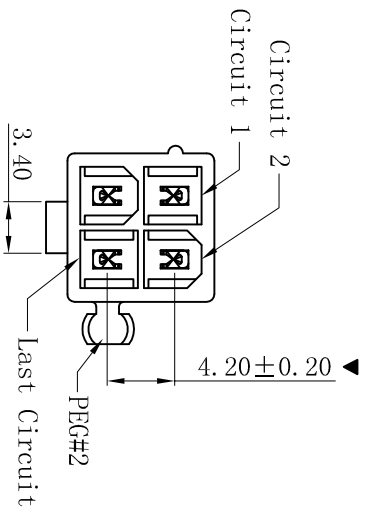

HSG Material/Color	None:PA66-V2 Natural	▶ P2:右边带定位柱
BK:PA66-V2 Black		Contact Finish
V0:PA66-V0 Natural		None: Tin-plated
V0BK:PA66-V0 Black		SW: Matte Tin-Plated
LP:LCP-V0 Natural		G: Gold-Flash
LPBK:LCP-V0 Black		G3: 3u" Gold
9T:PA9T-V0 Natural		G10: 10u" Gold
9TBK:PA9T-V0 Black		G15: 15u" Gold
46:PA46-V0 Natural		
46BK:PA46-V0 Black		
6T:PA6T-V0 Natural		
6TBK:PA6T-V0 Black		

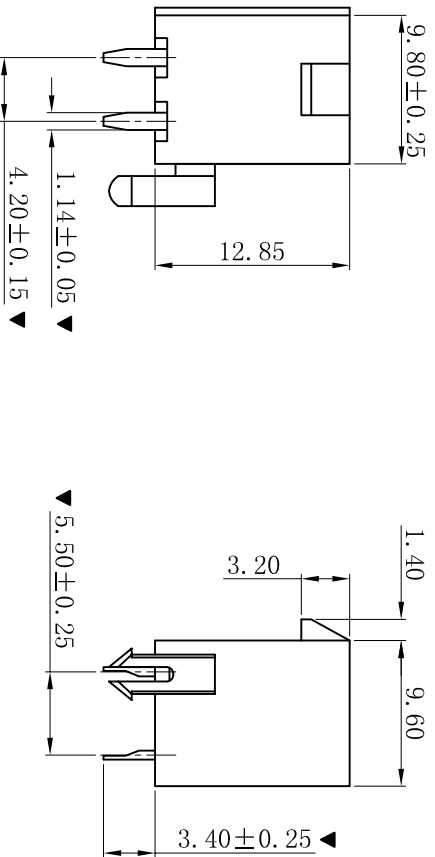

- ### ■ SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- ### ■ WAFER
- Part No.: W4202VTD-2x02P-XX-P2
 - Poles: 04P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Tin Thickness=100u" Nickel Thickness=50u"
 - The Dimension Marked "▶" Must Be Recorded

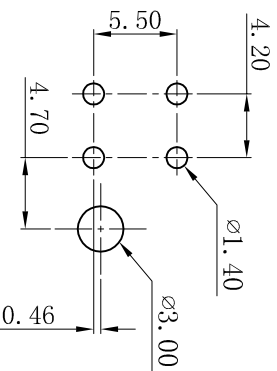

P.C.B LAYOUT

D	更新图面	2019-07-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角 1:1	MoIex 4.20mm 180° 空芯右边带柱 Wafer Connector Series	W4202VTD-2x02P-XX-P2	C
单位 Unit	大小/Size	页码/Sheet	
MM	A4	1/1	
比例/Scale	版本/Rev		
1:1	D		