
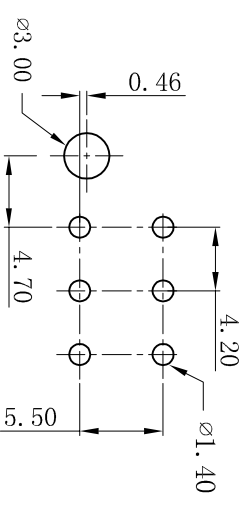
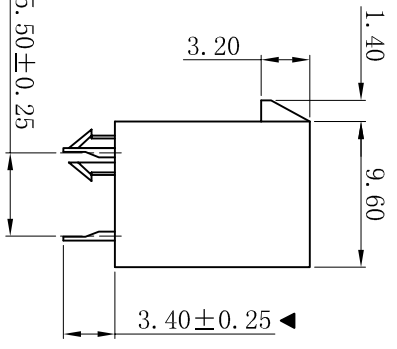
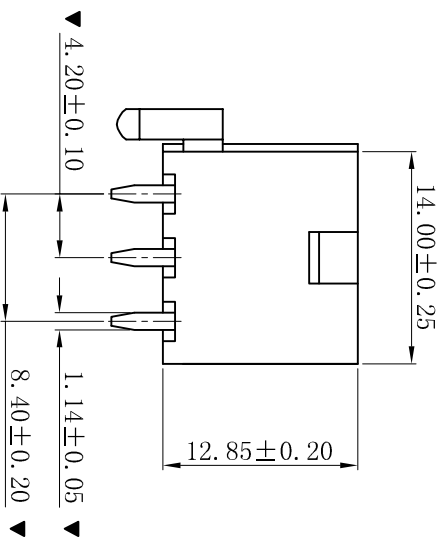


RoHS

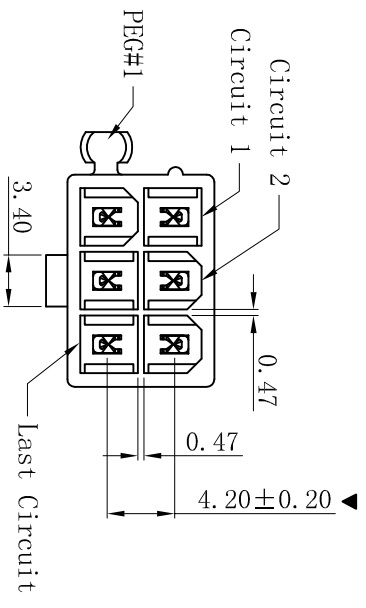

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202VTD-2x03P-V0SW-P1-Q
- Poles: 06P
- Housing Material: PA66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Matte Tin-Plated
- Ni:50u" Matte Tin(雾锡):100u"
- The Dimension Marked "▼" Must Be Recorded

| | | | | | | | |
|------|------------------------|------------|--------|-----------|--------------------|----------|--------------------------|
| D | 更新图面 | 2019-07-03 | 陈雄军 | 0±0.30 | 投影法 | 品名 | Molex 4.20mm 180° 空芯左边带柱 |
| C/1 | 内壁壁厚尺寸由0.45mm变更为0.47mm | 2016-10-10 | 陈雄军 | .0±0.25 | 一般公差 | 料号 | W4202VTD-2x03P-V0SW-P1-Q |
| C | 修订版本 | 2015-11-04 | 陈雄军 | .00±0.20 | GENERAL TOLERANCE: | 版本号 | D |
| B | 变更图宽格式内容 | 2013-12-27 | 陈雄军 | .000±0.05 | ANGLE: ±1° | 单位 | MM |
| A | 新版本 | 2011-05-24 | 陈雄军 | | 审核/CHK | 比例/Scale | 1:1 |
| 版次 | 说明 | 日期 | 承认 | | 核准/APPRO | 大小/Size | A4 |
| REV. | DESCRIPTION | DATE | APPRO. | | 日期/DATE | 页码/Sheet | 1/1 |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---------------------------------|---|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| <p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors Co., Ltd</p> | | | | | | | <p>连接器 Connectors</p> | | |
| <p>料号 (PART NO)</p> | | | | | | | <p>W4202VTD-2x03P-V0SW-P1-Q</p> | | |
| <p>状态码</p> | | | | | | | <p>C</p> | | |