



RoHS


W4202VTD-2x03P-X X-P1

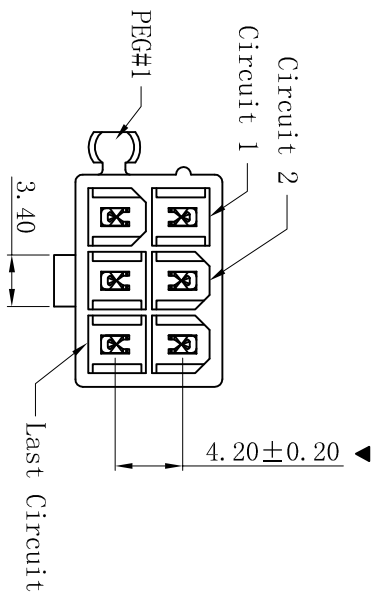

- HSG Material/Color  
 None: PA66-V2 Natural  
 BK: PA66-V2 Black  
 V0: PA66-V0 Natural  
 V0BK: PA66-V0 Black  
 LP: LCP-V0 Natural  
 LPBK: LCP-V0 Black  
 9T: PA9T-V0 Natural  
 9TBK: PA9T-V0 Black  
 46: PA46-V0 Natural  
 46BK: PA46-V0 Black  
 6T: PA6T-V0 Natural  
 6TBK: PA6T-V0 Black
- P1: 左边带定位柱  
 Contact Finish  
 None: Tin-plated  
 SW: Matte Tin-plated  
 G: Gold-Flash  
 G3: 3u" Gold  
 G10: 10u" Gold  
 G15: 15u" Gold

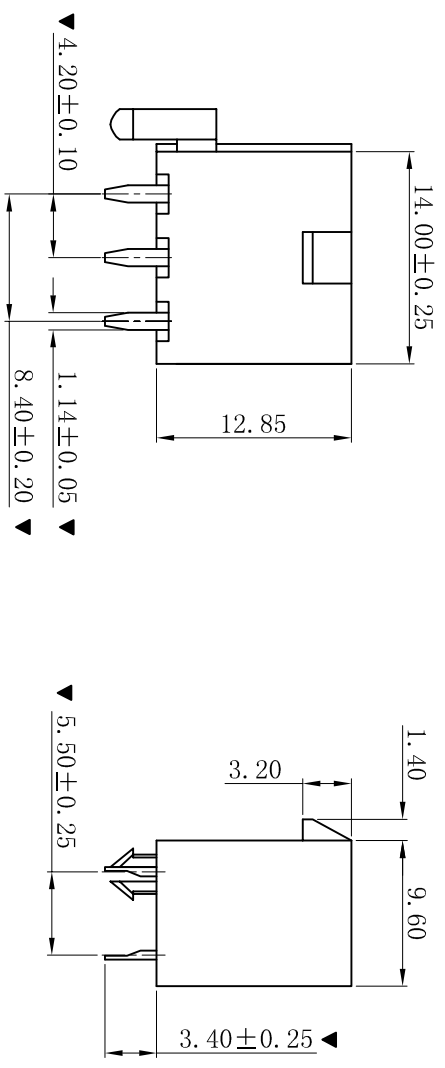

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VTD-2x03P-XX-P1
  - Poles: 06P
  - Housing Material: PA66 UL94V-2 or UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-plated or Gold-flash
  - Tin Thickness=100u" Nickel Thickness=50u"
  - The Dimension Marked "▼" Must Be Recorded

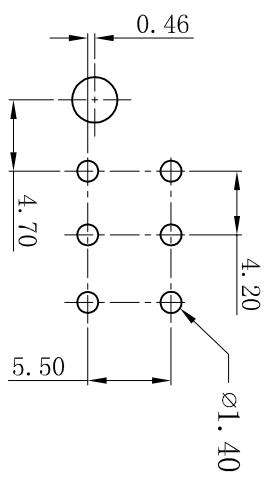

P.C.B LAYOUT

D	更新图面	2019-07-03	陈雄军
C	修订图面	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE
1	1	2	3
4	5	6	7

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.15
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
单位 Unit MM	Molex 4.20mm 180° 空芯左带柱 Wafer Connector Series		
比例/Scale 1:1			
大小/Size A4			
页码/SHEET 1/1			
版本/Rev D			