


# RoHS

W4202VTD-2x03P-XX-P2

P2: 右边带定位柱

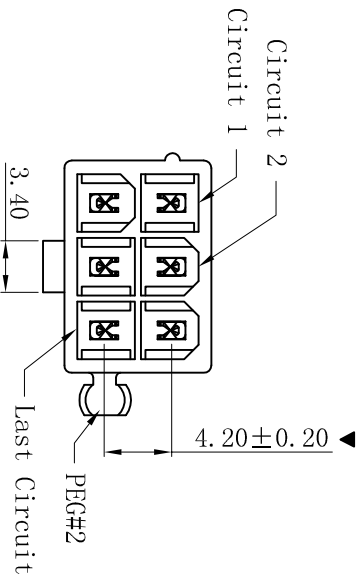



HSG: Material/Color	None: PA66-V2 Natural	Contact Finish	None: Tin-plated
BK: PA66-V2 Black		SW: Matte Tin-Plated	
V0: PA66-V0 Natural		G: Gold-Flash	
Y0BK: PA66-V0 Black		G3: 3u" Gold	
LP: LCP-V0 Natural		G10: 10u" Gold	
LPBK: LCP-V0 Black		G15: 15u" Gold	
9T: PA9T-V0 Natural			
9TBK: PA9T-V0 Black			
46: PA46-V0 Natural			
46BK: PA46-V0 Black			
6T: PA6T-V0 Natural			
6TBK: PA6T-V0 Black			

### SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

### WAFER

- Part No.: W4202VTD-2x03P-XX-P2
- Poles: 06P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash
- Tin Thickness=100u" Nickel Thickness=50u"
- The Dimension Marked "▼" Must Be Recorded

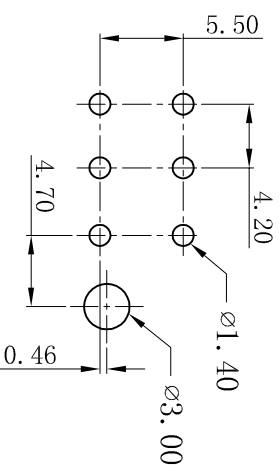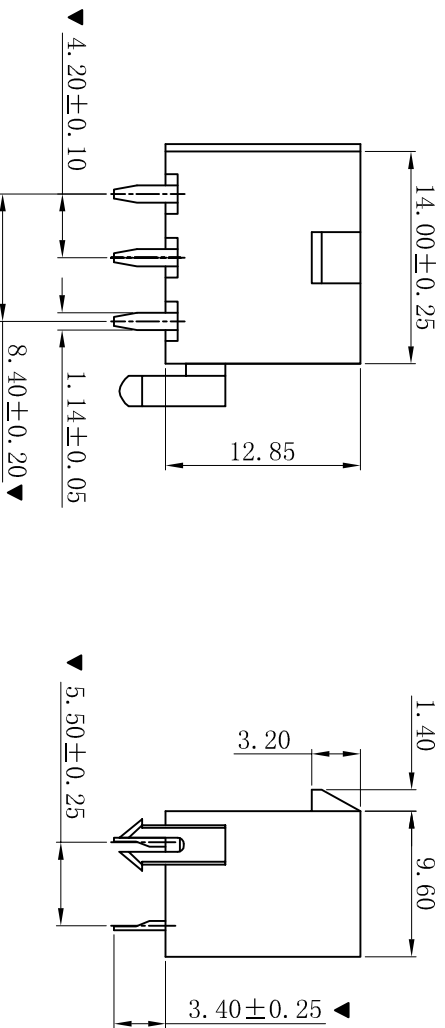

### P.C.B LAYOUT

D	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRIPTION

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	Molex 4.20mm 180° 空芯右边带柱 Water Connector Series
单位 Unit MM	大小/Size	A4
比例/Scale	页码/Sheet	1/1
料号 (PART NO)	版本/Rev	D
W4202VTD-2x03P-XX-P2	状态码	C