
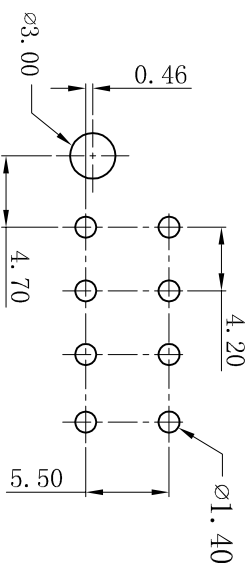
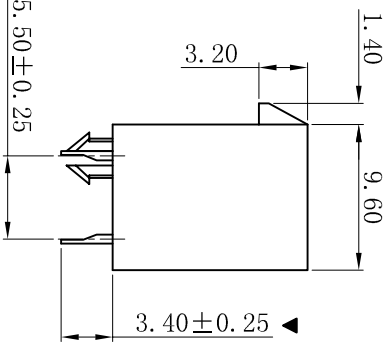
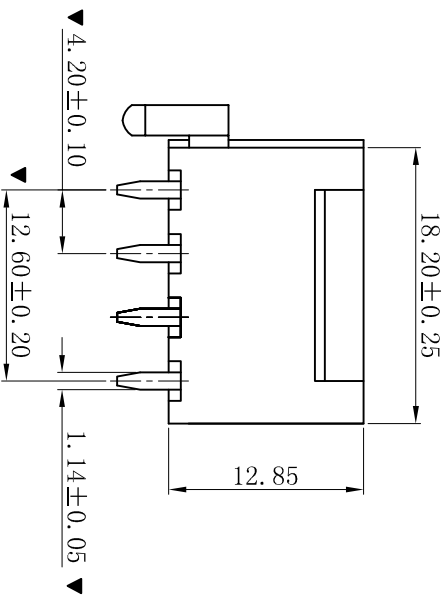


RoHS

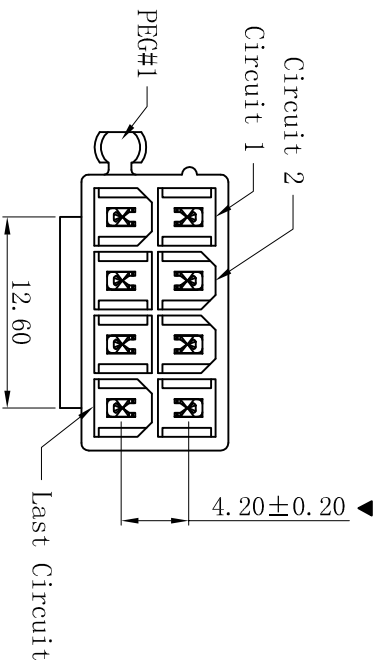

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202VTD-2x04P-9T-P1-K12.6
 - Poles: 08P
 - Housing Material: PA9T UL94V-0 NATURE COLOR
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Tin Thickness=100u" Nickel Thickness=50u"
 - The Dimension Marked "▼" Must Be Recorded

D	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE.
1	1	2	3

更新图面		2019-07-03	陈雄军
修订版本		2015-11-04	陈雄军
变更图宽格式内容		2013-12-27	陈雄军
新版本		2011-05-24	陈雄军
说明 DESCRIPTION		日期 DATE.	承认 APPRO.
1	2	3	4

<p>XYDZ® 东莞市祥运连接器有限公司</p> <p>Connectors Dongguan XiangYun Connectors CO., Ltd</p>	
<p>一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.05</p>	<p>ANGLE: ±1°</p>
<p>绘图/DR 审核/CHECK 核准/APPRO</p>	<p>胡进 陈雄军</p>
<p>日期/DATE</p>	<p>2019-07-03</p>
<p>投影法 Projection 单位 Unit MM</p>	<p>品名 (PART NAME) Molex 4.20mm 180° 空芯左带柱 Wafer Connector Series</p>
<p>比例/Scale 大小/Size 页码/SHEET 版本/Rev</p>	<p>料号 (PART NO) W4202VTD-2x04P-9T-P1-K12.6</p>
<p>日期/DATE</p>	<p>状态码 C</p>
6	7
8	9
10	