





# RoHS

W4202VTD-2x04P-XX-P2

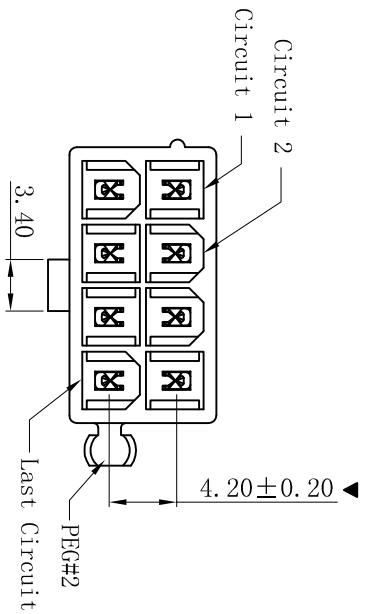

- HSG Material/Color  
None:PA66-V2 Natural  
BK:PA66-V2 Black  
V0:PA66-V0 Natural  
VOBK:PA66-V0 Black  
LP:ICP-V0 Natural  
LPBK:ICP-V0 Black  
9T:PA9T-V0 Natural  
9T BK:PA9T-V0 Black  
46:PA46-V0 Natural  
46BK:PA46-V0 Black  
6T:PA6T-V0 Natural  
6T BK:PA6T-V0 Black
- P2:右边带定位柱  
Contact Finish  
None:Tin-Plated  
SW:Matte Tin-Plated  
G:Gold-Flash  
G3:3u" Gold  
G10:10u" Gold  
G15:15u" Gold

- ### SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance:1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202VTD-2x04P-XX-P2
  - Poles: 08P
  - Housing Material: PA66 UL94V-2 or UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated or Gold-Flash
  - Tin Thickness=100u" Nickel Thickness=50u"
  - The Dimension Marked "▼" Must Be Recorded

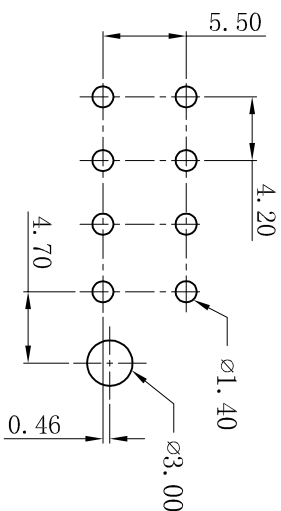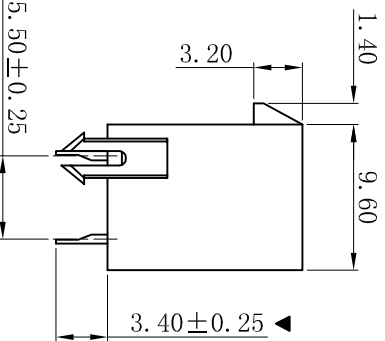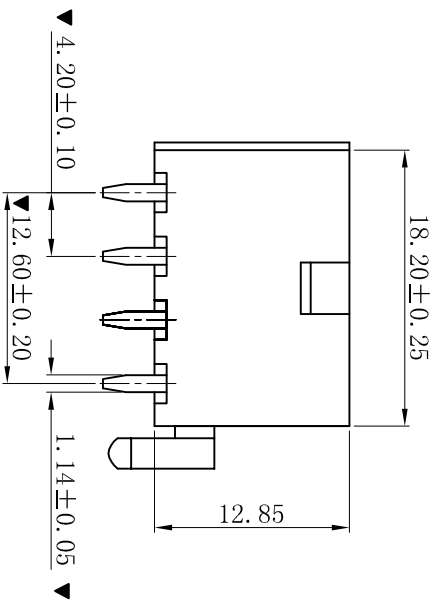

P. C. B LAYOUT

D	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRPTION

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	Molex 4.20mm 180° 空芯右边带柱 Wafer Connector Series
单位 Unit MM	料号 (PART NO)	W4202VTD-2x04P-XX-P2
比例/Scale 1:1	页码/SHEET 1/1	版本号 版本/Rev D
大小/Size A4	状态码	C