
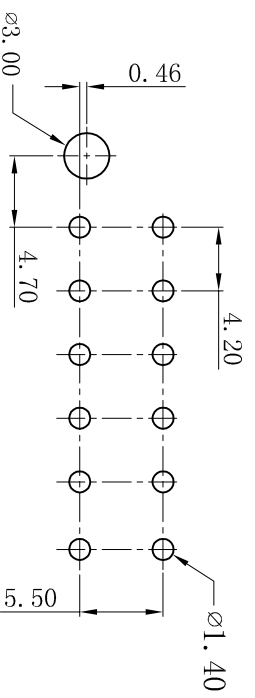
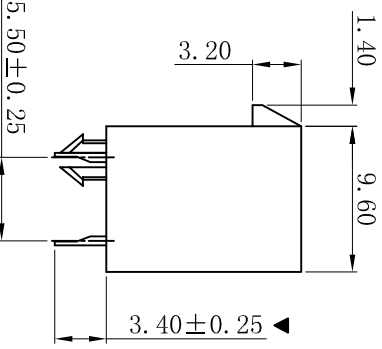
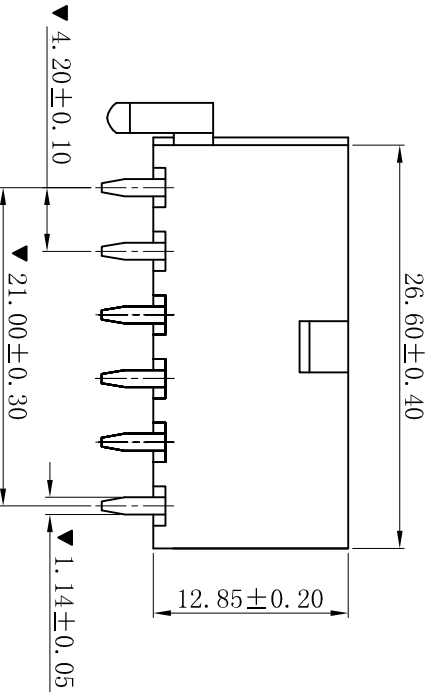


RoHS

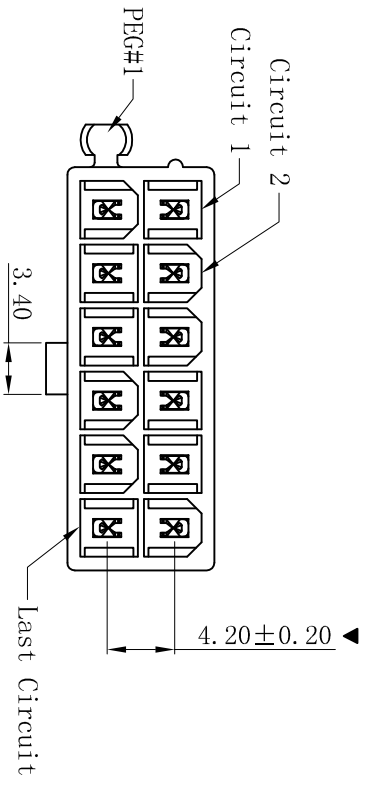

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VTD-2x06P-9T-P1
  - Poles: 12P
  - Housing Material: PA9T UL94V-0 Natural
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - Tin Thickness=100u" Nickel Thickness=50u"
  - The Dimension Marked "▲" Must Be Recorded

更新图面		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°	
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHKC		陈雄军	
新版本		2011-05-24		陈雄军		核准/APPRO		胡进	
说明		日期		承认		日期/DATE		2019-07-03	
DESCRPTION		DATE		APPRO.		日期/DATE		2019-07-03	
版次		说明		承认		日期/DATE		2019-07-03	
REV.		DESCRPTION		APPRO.		日期/DATE		2019-07-03	

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors Co., Ltd

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角法 1:1	Molex 4.20mm 180° 空芯左带柱 Wafer Connector Series	W4202VTD-2x06P-9T-P1	C
单位 Unit	大小/SIZE	页码/SHEET	
MM	A4	1/1	
比例/Scale	版本/REV		
1:1	D		