

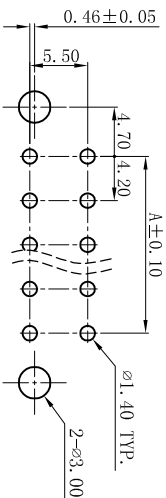

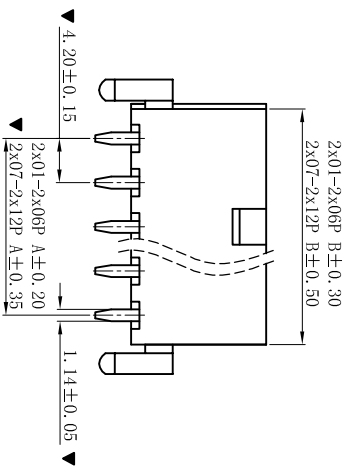
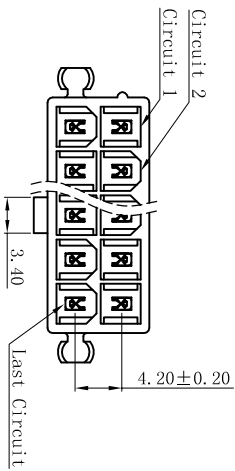


ROHS

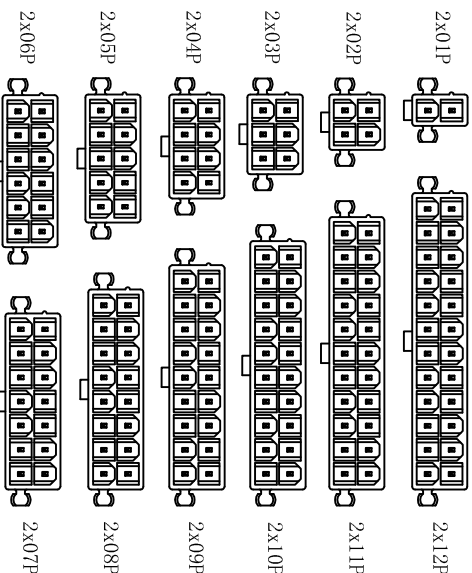

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ± 0.05mm



CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

- W4202VTD-2xNP-XX-GSN
- HSG: Material/Color
None:PA66-V2 Natural
BK:PA66-V2 Black
V0:PA66-V0 Natural
V0BK:PA66-V0 Black
LP:LCP-V0 Natural
LPBK:LCP-V0 Black
9T:PA9T-V0 Natural
9TBK:PA9T-V0 Black

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202VTD-2xNP-XX-GSN
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Gold(G/F)-Plated
 - Solder Area Plating: Tin-Plated
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▲" Must Be Recorded

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

更新/DR	更新/DR	2019-07-03	PP: Duow	PP: Duow	2019-07-03	胡进	1/1	W4202VTD-2xNP-XX-GSN	状态码
审核/CHECK	审核/CHECK	2019-04-11	PP: Duow	PP: Duow	2019-04-11	胡进	1/1	W4202VTD-2xNP-XX-GSN	状态码
说明	说明								
版次	版次								
REV.	REV.								