
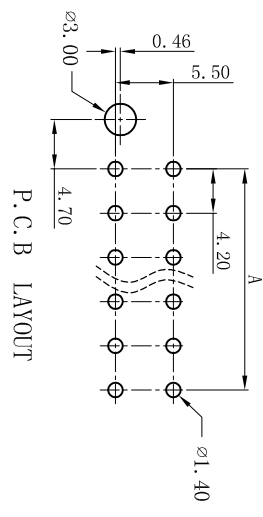
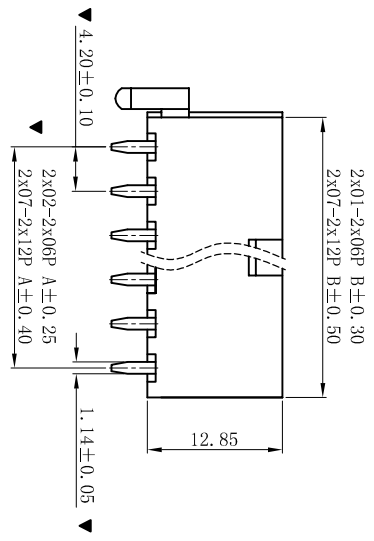




RoHS

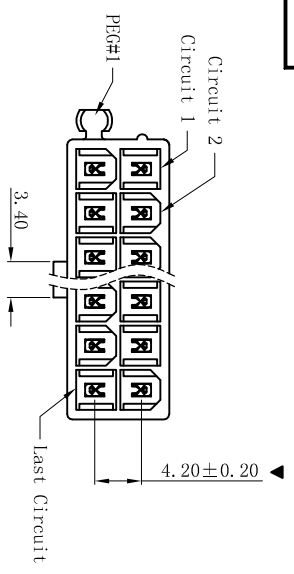


W4202VTD-2xNP-X
X-P1

HSG Material/Color
None: PA66-V2 Natural
BK: PA66-V2 Black
V0: PA66-V0 Natural
V0BK: PA66-V0 Black
LP: LCP-V0 Natural
LPBK: LCP-V0 Black
9T: PA9T-V0 Natural
46: PA46-V0 Black
46BK: PA46-V0 Black
6T: PA6T-V0 Natural
6TBK: PA6T-V0 Black

接触表面处理
None: Tin-Plated
Tin Thickness=100u"
Nickel Thickness=30u"
SW: Matte Tin-Plated
G: Gold-Flash
G3: 3u" Gold
G10: 10u" Gold
G15: 15u" Gold
G30: 30u" Gold



- ### ■ SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C~+85 °C
 - Contact resistance: 20mΩ max
- ### ■ WAFER
- Part No.: W4202VTD-2xNP-XX-P1
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▲" Must Be Recorded

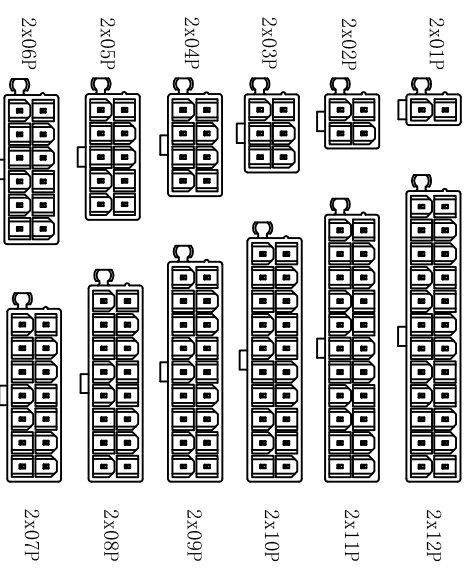

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

D	更新图画	2019-07-03	陈雄军	更新图画
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	新版本	2013-12-27	陈雄军	新版本
A	说明	2011-05-24	陈雄军	说明
版次	说明	日期	承认	版次
REV.	DESCRIPTION	DATE	APPRO.	REV.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
角度	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

投影法	第一角	品名	Molex 4.20mm 180° 空芯左边
Projection	1st Angle	(PART NAME)	带柱 Wafer Connector Series
单位 Unit	MM	料号	W4202VTD-2xNP-XX-P1
比例/Scale	1:1	(PART NO)	状态码
大小/SIZE	A4		C
页码/SHEET	1/1		
版本/Rev	D		