


W4202VTD-2xNP-XX

HSG: Material/Color
 None:PA66-V2 Natural
 BK:PA66-V2 Black
 V0:PA66-V0 Natural
 Y0BK:PA66-V0 Black
 LP:LCp-V0 Natural
 LPBK:LCp-V0 Black
 9T:PA9T-V0 Natural
 91BK:PA9T-V0 Black
 46:PA46-V0 Natural
 46BK:PA46-V0 Black
 6T:PA6T-V0 Natural
 6T BK:PA6T-V0 Black

Contact Finish
 None: Tin-Plated
 Tin Thickness=100u"
 Nickel Thickness=50u"
 SW: Matte Tin-Plated
 G: Gold-Flash
 G3:30" Gold
 G10:10u" Gold
 G15:15u" Gold
 G30:30u" Gold

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VTD-2xNP-XX
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▲" Must Be Recorded

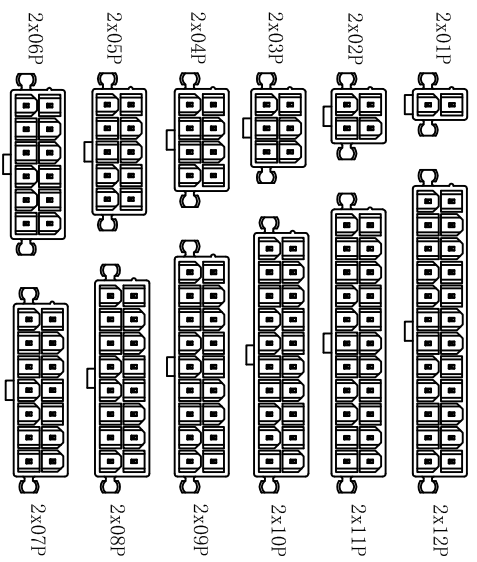

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

更新图画		2019-07-03	陈雄军	一般公差	0±0.30	投影法	品名	Molex 4.20mm 180° 空芯带柱
修订版本		2015-11-04	陈雄军	GENERAL TOLERANCE:	.00±0.25	第一角	(PART NAME)	Wafer Connector Series
变更图宽格式内容		2013-12-27	陈雄军	ANGLE: ±1°	.000±0.05	MM	料号	W4202VTD-2xNP-XX
新版本		2011-05-24	陈雄军			1:1	(PART NO)	
说明		日期	承认	绘图/DR	陈雄军	大小/SIZE	A4	状态码
DESCRPTION		日期	承认	审核/CHK	胡进	页码/SHEET	1/1	
REV.		DATE	APPRO.	核准/APPRO	2019-07-03	版本/REV	D	

