
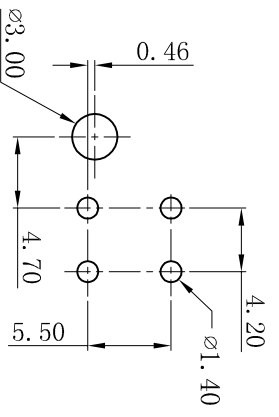
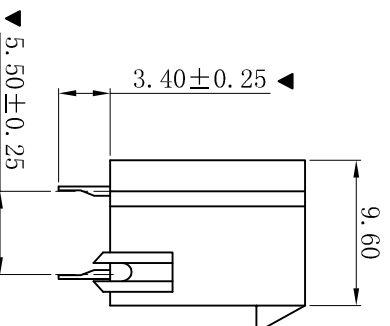
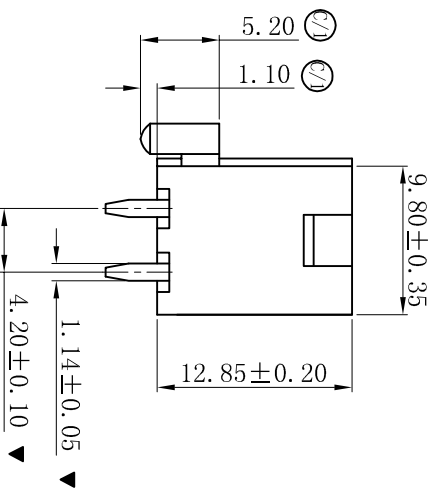


RoHS

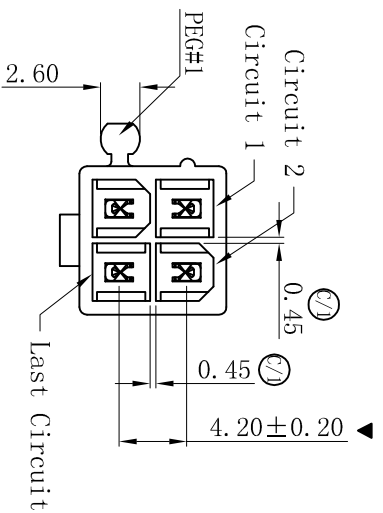

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VTDD-2x02P-V0-P1-BT
  - Poles: 04P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - Tin Thickness=100u" Nickel Thickness=50u"
  - The Dimension Marked "▼" Must Be Recorded

D	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军	胡进	W4202VTDD-2x02P-V0-P1-BT	状态码
C/2	修订视图方向	2017-02-23	陈雄军	更新图面	2019-07-03	陈雄军	胡进	W4202VTDD-2x02P-V0-P1-BT	C

C/1	1. 内壁壁厚尺寸由0.40mm变更为0.45mm 2. 柱子高度7.00变更为5.20, 3. 25mm变更为1.10mm	2016-09-01	陈雄军	更新图面	2019-07-03	陈雄军	胡进	W4202VTDD-2x02P-V0-P1-BT	C
C	修订版本	2015-11-04	陈雄军	更新图面	2019-07-03	陈雄军	胡进	W4202VTDD-2x02P-V0-P1-BT	C
版次 RRV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.	日期 DATE.	承认 APPRO.

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
Projection  
单位 Unit  
MM

品名  
(PART NAME)  
Molex 4.20mm 180° 空芯左带柱  
Wafer Connector Series

料号  
(PART NO)  
W4202VTDD-2x02P-V0-P1-BT

1 2 3 4 5 6 7 8 9 10