
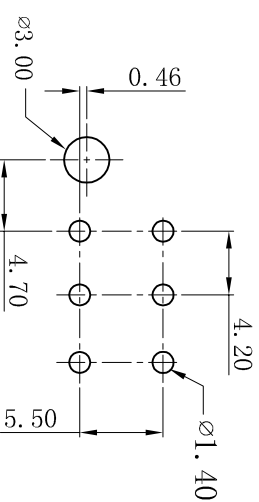
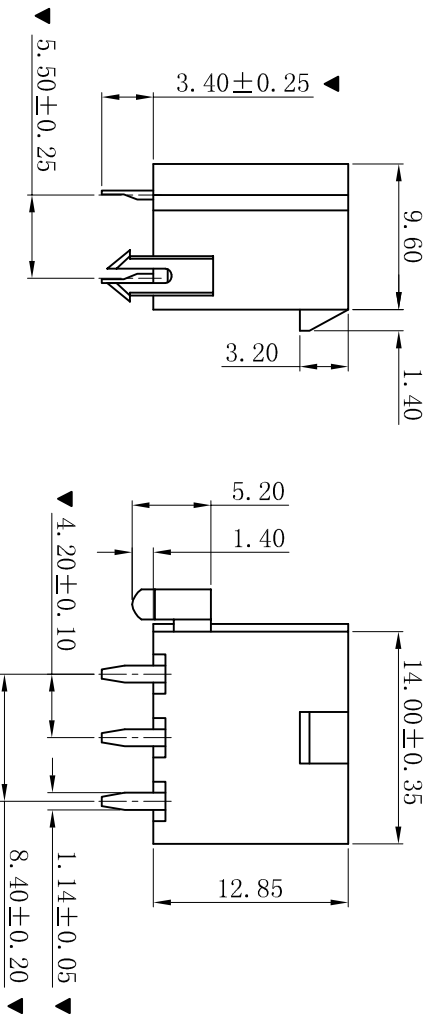


ROHS

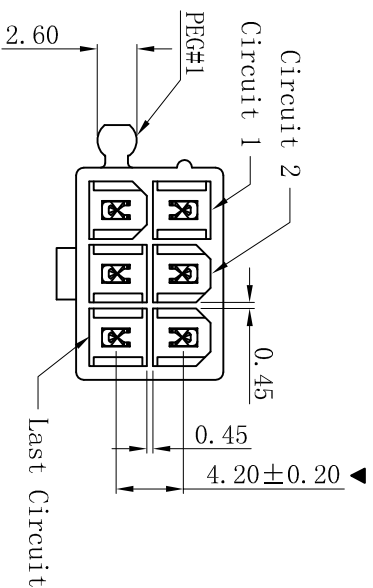

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W4202VTTDD-2x03P-V0-P1-Q
 - Poles: 06P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - Tin Thickness=100u" Nickel Thickness=50u"
 - The Dimension Marked "▼" Must Be Recorded

更新图面		2019-07-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection		品名 (PART NAME)		Molex 4.20mm 180° 空芯左带柱 Wafer Connector Series	
D	C/1	1. 内壁壁厚尺寸由0.40mm变更为0.45mm 2. 柱子高度7.00变更为5.20, 3.25mm变更为1.40mm		2017-06-01	陈雄军	ANGLE: ±1°		单位 Unit	MM	料号 (PART NO)		W4202VTTDD-2x03P-V0-P1-Q
C	修订版本		2015-11-04	陈雄军	审核/CHKC		陈雄军	比例/Scale	1:1	状态码		C
B	变更图宽格式内容		2013-12-27	陈雄军	日期/DATE		2019-07-03	页码/Sheet	1/1	版本/Rev		D
A	新版本		2011-05-24	陈雄军	日期/DATE		2019-07-03	页码/Sheet	1/1	版本/Rev		D
H	说明		2011-05-24	陈雄军	日期/DATE		2019-07-03	页码/Sheet	1/1	版本/Rev		D
1	版次		2011-05-24	陈雄军	日期/DATE		2019-07-03	页码/Sheet	1/1	版本/Rev		D
1	版次		2011-05-24	陈雄军	日期/DATE		2019-07-03	页码/Sheet	1/1	版本/Rev		D

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd