


RoHS

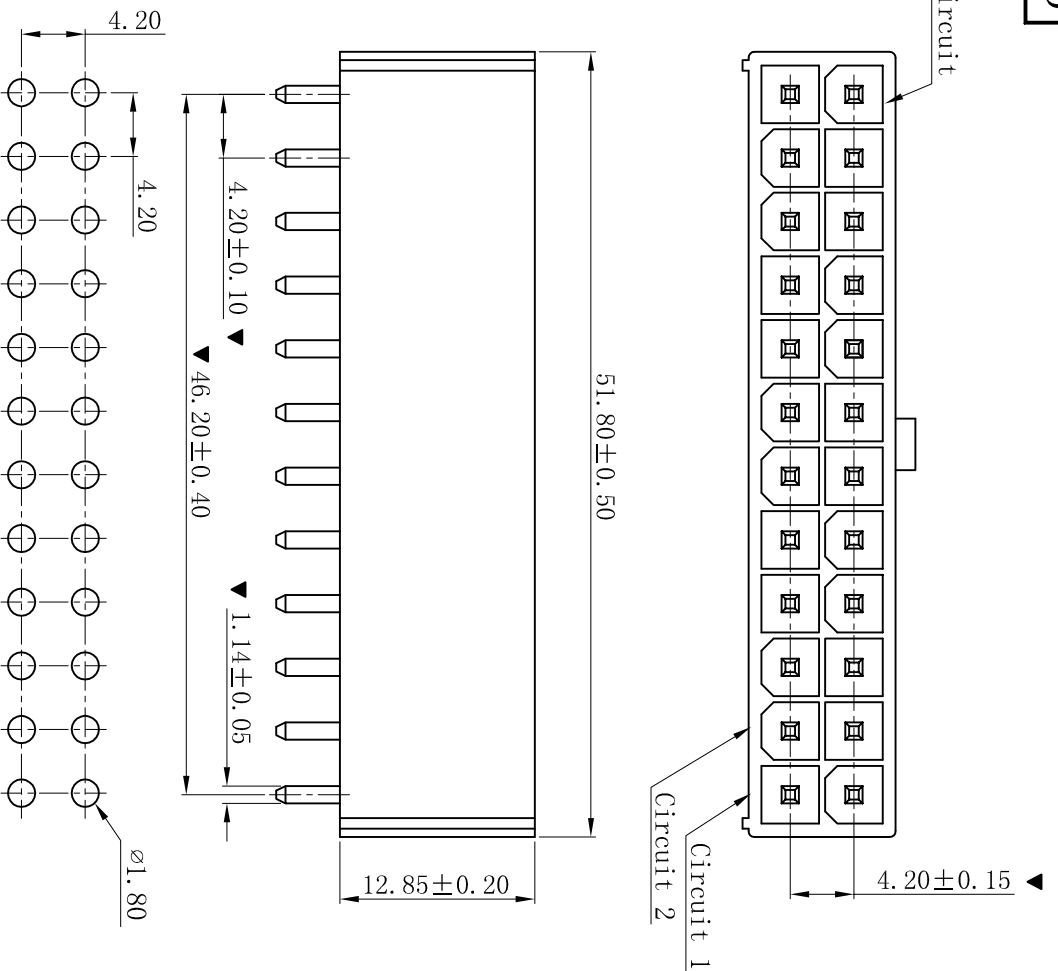

P.C.B LAYOUT

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W4202VWJ-2x12P-BK-WL4.2
 - Poles: 24P
 - Housing Material: PA66 UL94V-2 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - PIN L= 1.14x13.50
 - The Dimension Marked “▼” Must Be Recorded

D	更新图档	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 REV.	说明 DESCRIPTION	日期 DATE
1			承认 APPRO.

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1 $^{\circ}$	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ[®] 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd	
投影法 Projection 	品名 (PART NAME) Molex 4.20mm 180 $^{\circ}$ 无筋 Wafer Connector Series
单位 Unit MM	料号 (PART NO) W4202VWJ-2x12P-BK-WL4.2
比例/Scale 1:1	页码/SHEET 1/1
大小/Size A4	版本/Rev D
状态码 C	