

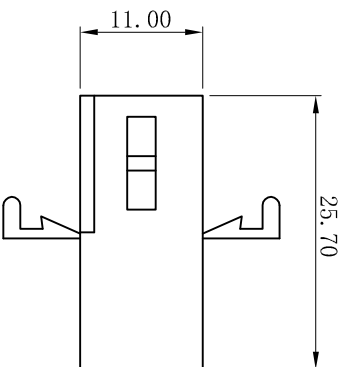
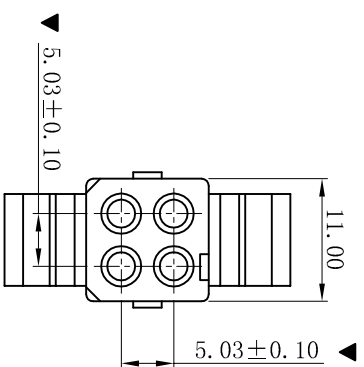


RoHS

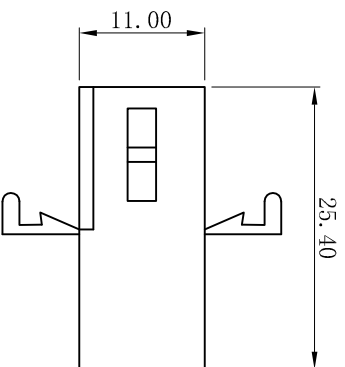

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C
- HOUSING
- Part No. : H5031-2xNP
  - Poles : 04-06P
  - Housing Material : PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded

H5031-2x02P  
H5031NE-2x02P

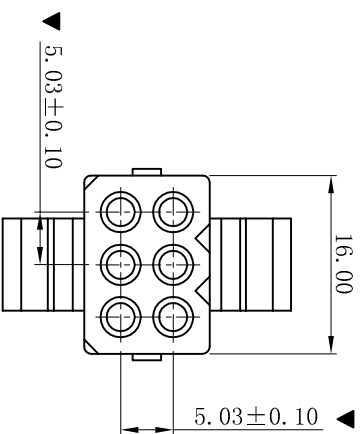

H5031-2x03P  
H5031NE-2x03P

更新图画		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd		投影法 Projection		品名 (PART NAME)		5.03mm Male Housing Connector Series		料号 (PART NO)		H5031-2xNP		状态码 C		
修订版本		2015-11-04	陈雄军	绘图/DR		陈雄军	审核/CHKC		陈雄军	单位 Unit		MM		比例/Scale		1:1		大小/Size		A4	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHKC		陈雄军	批准/APPRO		胡进	日期/DATE		2019-06-03		页码/SHEET		1/1		版本/Rev		D	
新版本		2011-05-24	陈雄军	日期 DATE		APPRO		承认		说明 DESCRIPTION		版次 REV.		1		2		3		4	