
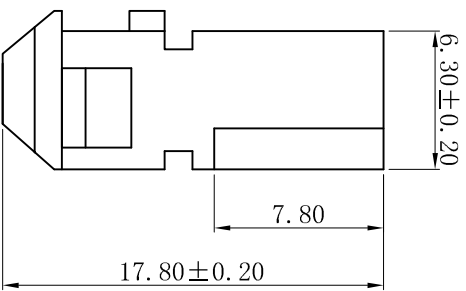
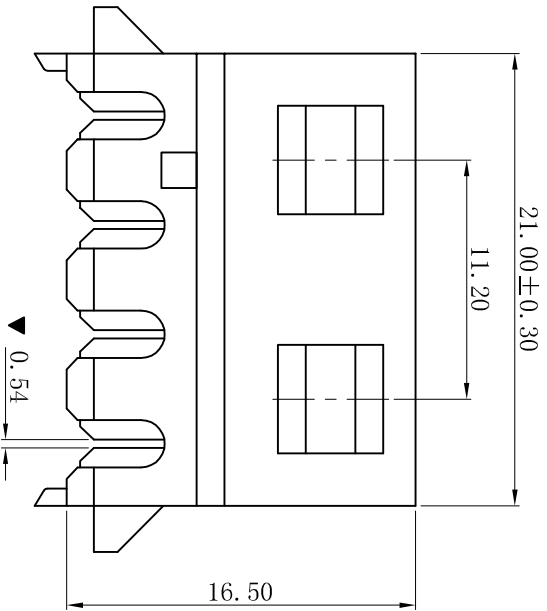


RoHS

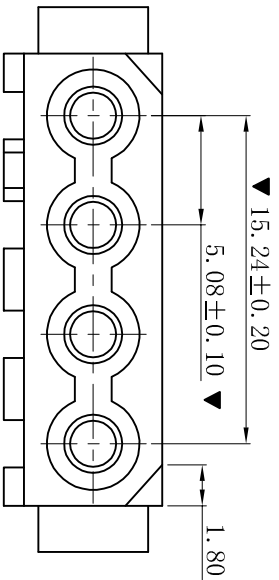

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max
- Salt Spray: 24±1 hours exposure to a salt spray from the 5 ±1% solution at 35±2°C.

■ HOUSING

- Part No.: F5081T-04P-20#-CD
- Housing Material: PA66 UL94V-2
- Pin Material: Brass
- Contact Area Plating: Tin-Plated (先冲后镀)
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 5.08mm 刺破式 Housing Connector Series	
修订版本		2015-11-04		陈雄军		绘图/DR 陈雄军		大小/Scale 1:1		料号 (PART NO) F5081T-04P-20#-CD	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHKC 胡进		页码/SHEET 1/1		状态码 C	
新版本		2011-05-24		陈雄军		日期/DATE 2019-06-03		版本/Rev D			
说明 DESCRIPTION		日期 DATE		承认 APPRO.		日期/DATE		版本/Rev			
版次 REV.		1		1		6		7		8	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd