

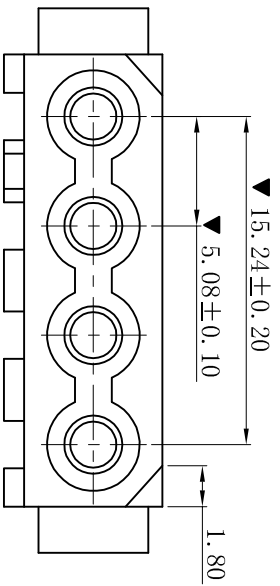
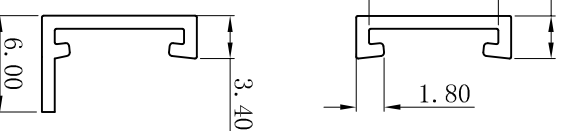
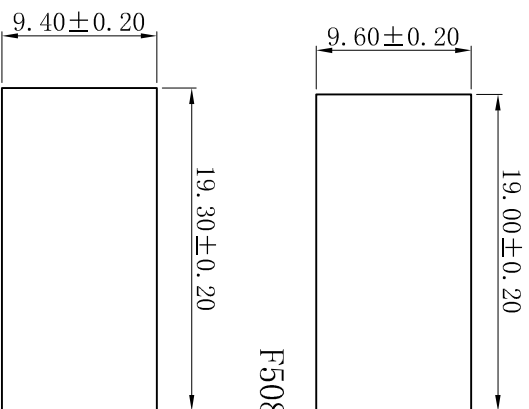


RoHS

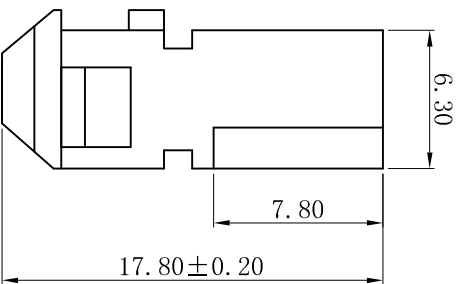

F5081GV	180° CAP
F5081GR	90° CAP
F5081T-04-18#	W=0.58 Wire:18#
F5081T-04-20#	W=0.54 Wire:20#-22#

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : F5081T-04P-XX#
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass or Phosphor Bronze
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

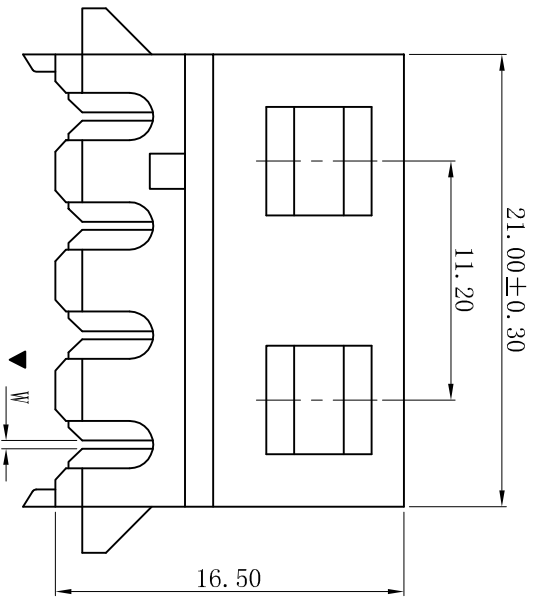

F5081GR

F5081GV

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRIPTION

一般公差		0±0.30
GENERAL TOLERANCE:		.0±0.25
		.000±0.20
		.000±0.05
ANGLE: ±1°		
绘图/DR	陈雄军	
审核/CHECK	胡进	
批准/APPRO	MR. feng	
日期/DATE	2015-11-04	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/SHEET: 1/1
版本/Rev: D

品名 (PART NAME): Molex 5.08mm 刺破式主体
料号 (PART NO): F5081T-04P-XX#
状态码: C