
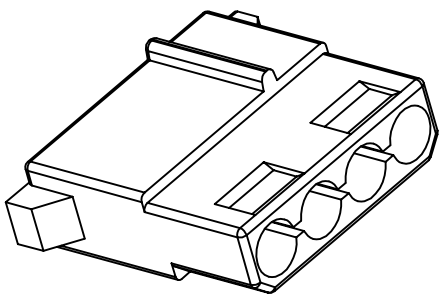
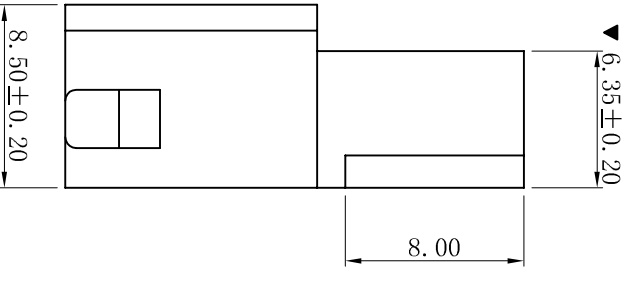
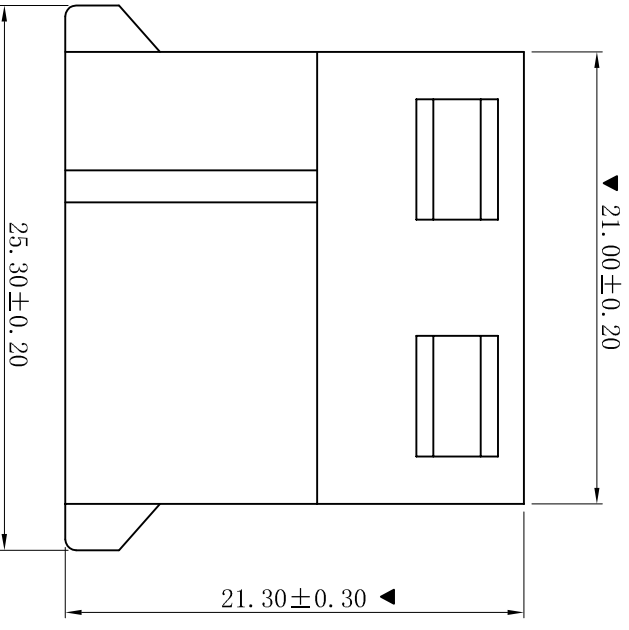


RoHS

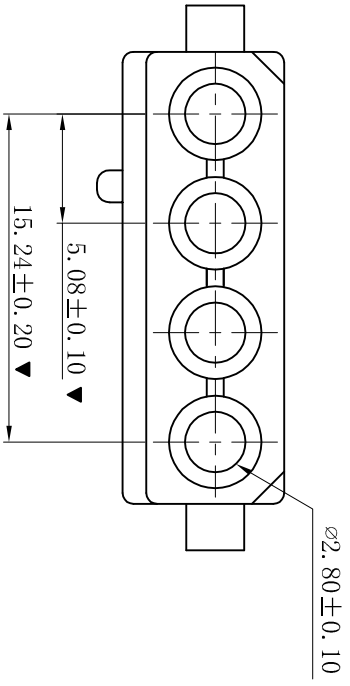

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- HOUSING**
- Part No. : H5081-04P-D
 - Housing Material : PA66 UL94V-2
 - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1 $^{\circ}$		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 5.08mm Male Housing Connector Series	
修订版本		2015-11-04	陈雄军	绘图/DR 陈雄军		大小/Size A4		料号 (PART NO.) H5081-04P-D	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK 胡进		页码/Sheet 1/1		状态码 C	
新版本		2011-05-24	陈雄军	批准/APPRO 胡进		版本/Rev D			
说明		日期	承认	日期/DATE		版本/Rev			
DESCRPTION		DATE	APPRO.						
版次									
REV.									

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd