




ROHS

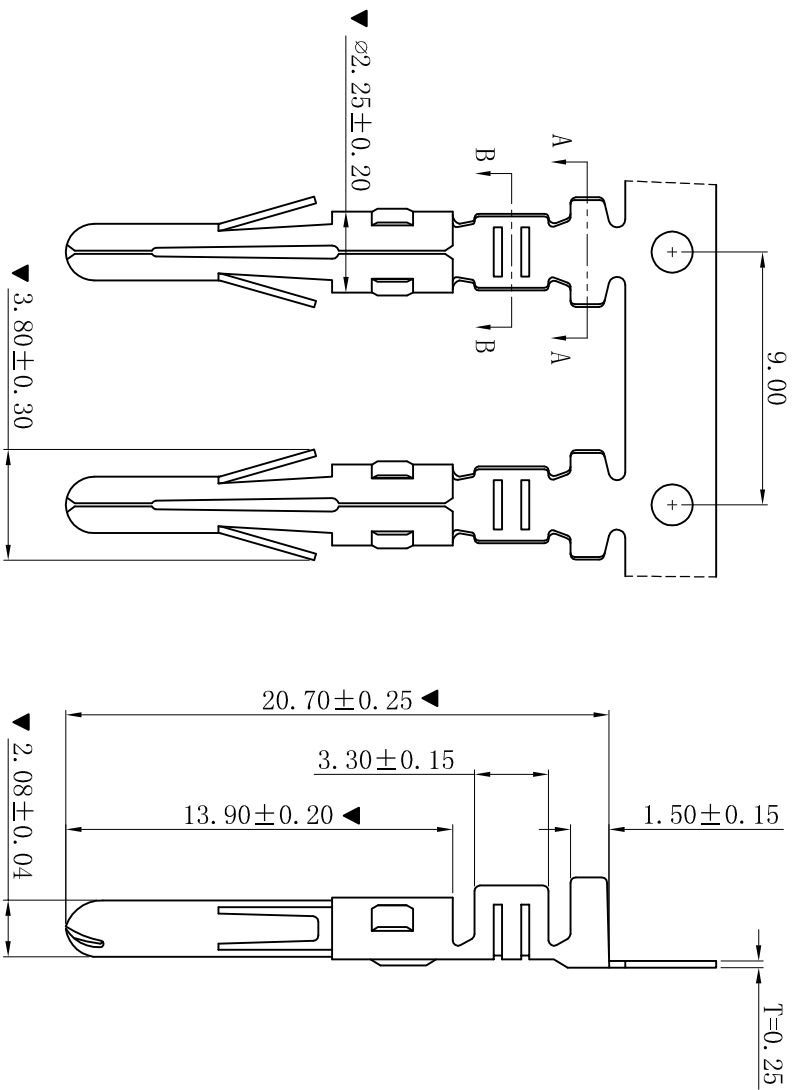

SECTION: A-A



SECTION: B-B

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Part No. : T5081BT-D
- Applicable wire: AWG#18-#22
- Material: Brass
- Finish: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		PPAP		一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		投影法 Projection 单位 Unit MM		品名 (PART NAME) Molex 5.08mm Male Terminal Connector Series		料号 (PART NO) T5081BT-D		状态码 C	
修打版本		2015-11-04		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		审核/CHECK 陈雄军		XYPDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd					
变更图规格式内容		2013-12-27		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		核准/APPRO 胡进							
新版本		2011-05-24		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		日期/DATE 2019-06-03							
说明		2011-05-24		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		日期/DATE 2019-06-03							
DESCRPTION		2011-05-24		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		日期/DATE 2019-06-03							
版次 REV.		2011-05-24		陈雄军		PPAP		±0.30 .0±0.25 .00±0.20 .000±0.05		ANGLE: ±1°		日期/DATE 2019-06-03							