
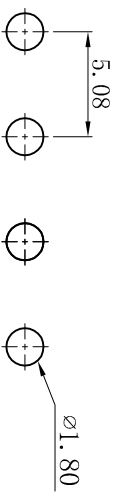
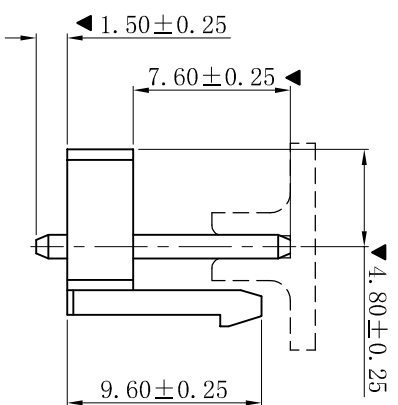
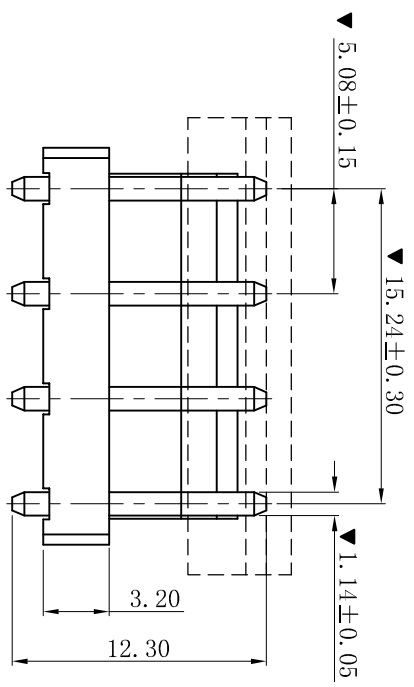


RoHS

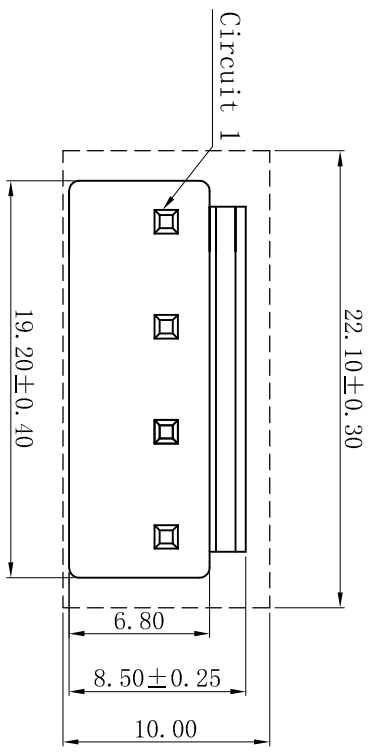

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C +85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W5081V-04P-46-WL1.5
  - Poles : 04P
  - Housing Material: PA46 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.25 .0±0.20 .00±0.15 .000±0.05		XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd	
修打版本		2015-11-04		陈雄军		绘图/DR		陈雄军		投影法 Projection	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		单位 Unit	
新版本		2011-05-24		陈雄军		核准/APPRO		胡进		比例/Scale	
说明		日期		承认		日期/DATE		2019-06-03		大小/SIZE	
版次		REV.		1		日期/DATE		2019-06-03		页码/SHEET	
1		2		3		4		5		版本/Rev	
1		2		3		4		5		D	

品名		5.08mm 180° 4P Wafer	
(PART NAME)		Connector Series	
料号		W5081V-04P-46-WL1.5	
(PART NO)		状态码	
C			