

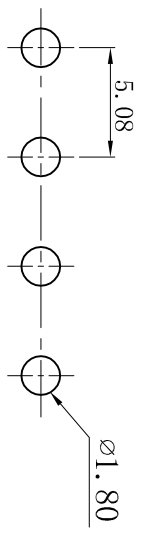
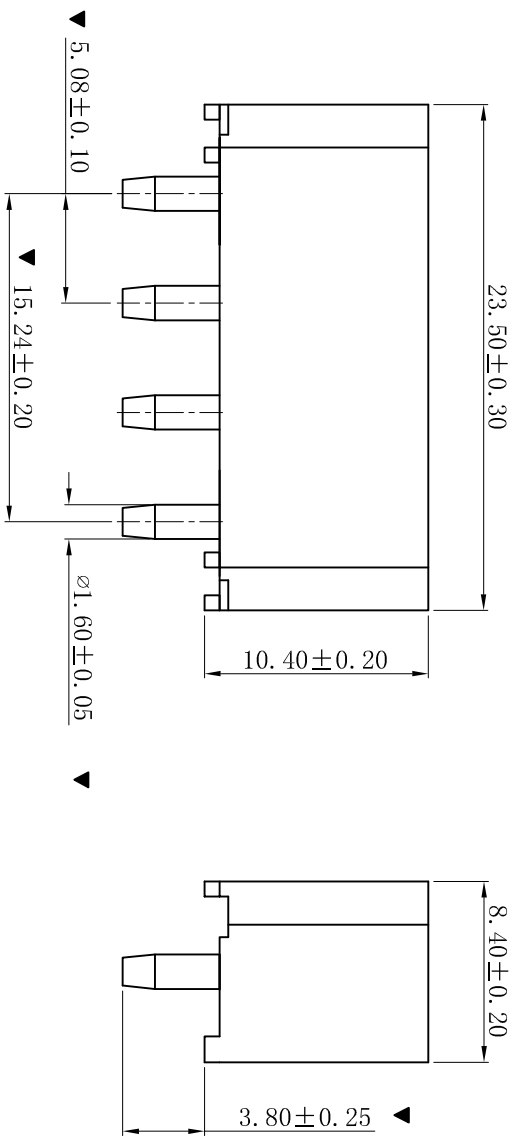


RoHS

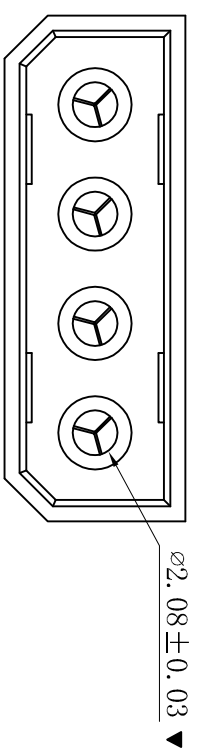

P.C.B LAYOUT: TOP VIEW
TOLERANCE: $\pm 0.05\text{mm}$

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C \sim +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER**
- Part No.: W5082V-04P-WL3.8
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

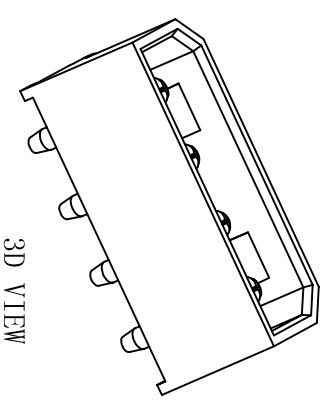

3D VIEW

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0 \pm 0.30 .0 \pm 0.25 .000 \pm 0.20	绘图/DR 审核/CHECK 批准/APPRO	陈雄军 胡进	投影法 Projection	品名 (PART NAME)	Molex 5.08mm 180 $^{\circ}$ Wafer Connector Series	料号 (PART NO)	W5082V-04P-WL3.8	状态码	C
C	修打版本	2015-11-04	陈雄军	ANGLE: $\pm 1^{\circ}$	2x 2x	日期/DATE	2019-06-03	单位 Unit	MM					
B	变更图宽格式内容	2013-12-27	陈雄军			大小/SIZE	A4	比例/Scale	1:1					
A	新版本	2011-05-24	陈雄军			页码/SHEET	1/1	版本/Rev	D					
H	版次 REV.	1	说明 DESCRIPTION	日期 DATE	承认 APPRO.									

XYDZ $^{\circ}$ 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----