


RoHS

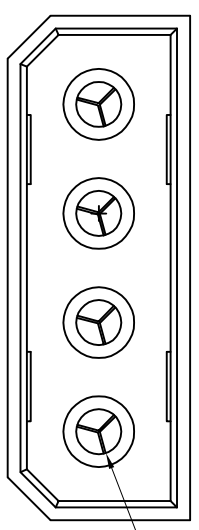


$\varnothing 2.08 \pm 0.03$


$23.50 \pm 0.30$

$9.70 \pm 0.20$


$5.08 \pm 0.10$   
 $15.24 \pm 0.20$   
 $\varnothing 1.60 \pm 0.05$

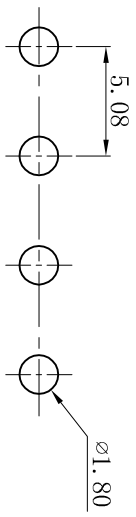

P.C.B LAYOUT: TOP VIEW  
 TOLERANCE:  $\pm 0.05\text{mm}$



- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
  - Contact resistance: 20m $\Omega$  max
- WAFER
- Part No. : W5082V-04P-WT-WL3.0
  - Housing Material: PA66 UL94V-2
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded
  - PIN L=2.08x11.6mm

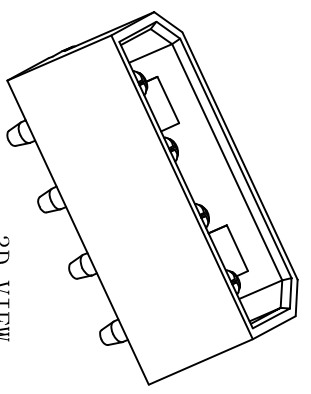

3D VIEW

更新图面		2019-06-03	陈雄军	一般公差	0 $\pm$ 0.30	投影法 	品名 (PART NAME) Molex 5.08mm 180 $^{\circ}$ 特殊嵌壳 Wafer Connector Series	料号 (PART NO) W5082V-04P-WT-WL3.0	状态码 C
修订版本		2015-11-04	陈雄军	GENERAL TOLERANCE:	.00 $\pm$ 0.25				
变更图宽格式内容		2013-12-27	陈雄军	ANGLE: $\pm 1^{\circ}$	.000 $\pm$ 0.05				
新版本		2011-05-24	陈雄军	绘图/DR		单位 Unit	MM		
说明		日期	承认	审核/CHECK		比例/Scale	1:1		
DESCRIPTION		DATE	APPRO.	核准/APPRO		大小/SIZE	A4		
				日期/DATE	2019-06-03	页码/SHEET	1/1		
				DATE		版本/Rev	D		

XYDZ $^{\circ}$  东莞市祥运连接器有限公司  
 Dongguan XiangYun Connectors CO., Ltd