



RoHS

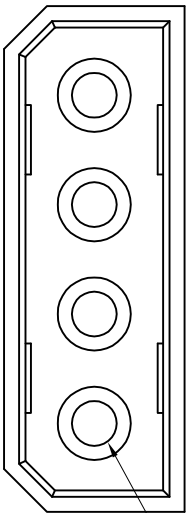

$\varnothing 2.05 \pm 0.03$

23.50 ± 0.30

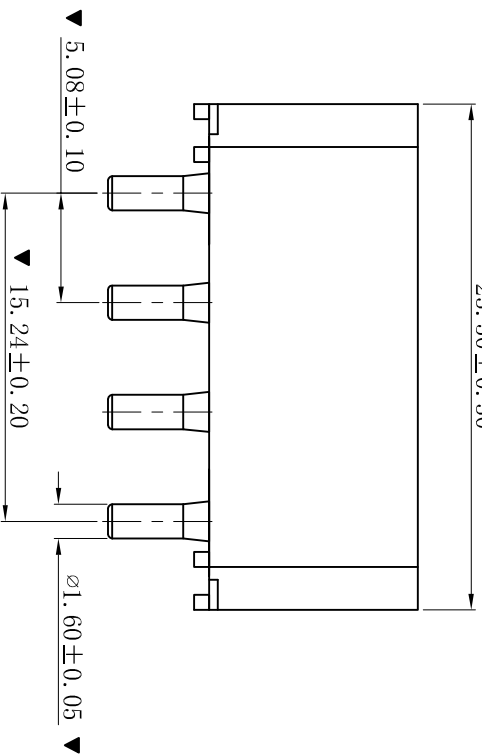


5.08 ± 0.10


15.24 ± 0.20

$\varnothing 1.60 \pm 0.05$

8.40 ± 0.20

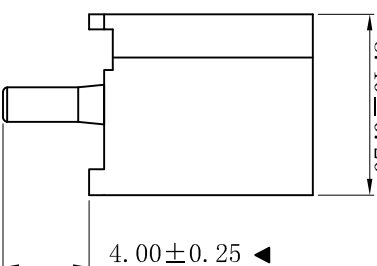

4.00 ± 0.25

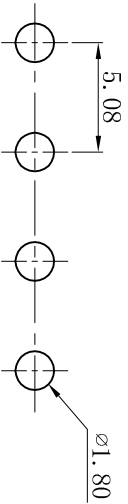

5.08

$\varnothing 1.80$


P. C. B LAYOUT: TOP VIEW
TOLERANCE: $\pm 0.05\text{mm}$

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: $-25^{\circ}\text{C}^{\sim}+85^{\circ}\text{C}$
- Contact resistance: 20m Ω max

■ WAFER

- Part No. : W5082VG-04P
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked "▼" Must Be Recorded

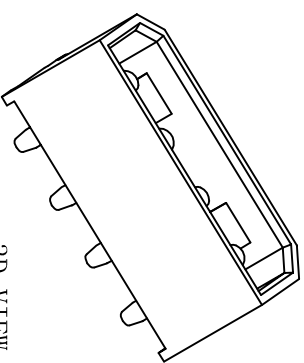

3D VIEW

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRPTION	DATE	APPRO.

一般公差	0 \pm 0.30
GENERAL TOLERANCE:	.0 \pm 0.25
	.000 \pm 0.20
	.000 \pm 0.05
ANGLE: $\pm 1^{\circ}$	
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection		品名 (PART NAME)	Molex 5.08mm 180° 实心Wafer Connector Series
单位 Unit	MM	料号 (PART NO)	W5082VG-04P
比例/Scale	1:1	页码/SHEET	1/1
大小/Size	A4	版本/Rev	D
状态码	C		