

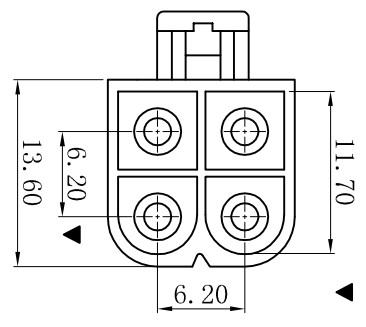
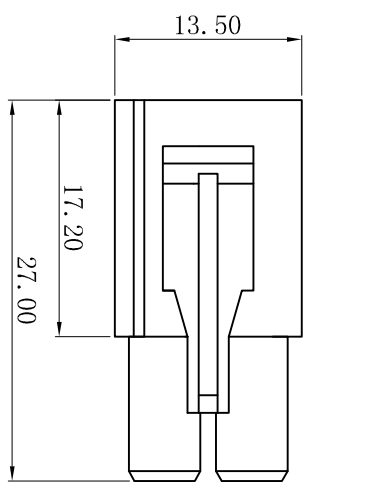


RoHS

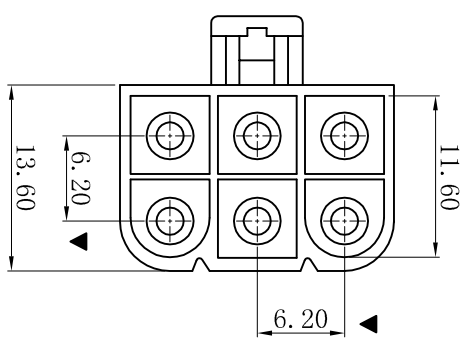

H6201-2x02P

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H6201-2xNP
 - Poles : 04-06P
 - Housing Material: PA66 UL94V-2
 - The Dimension Marked “▼” Must Be Recorded

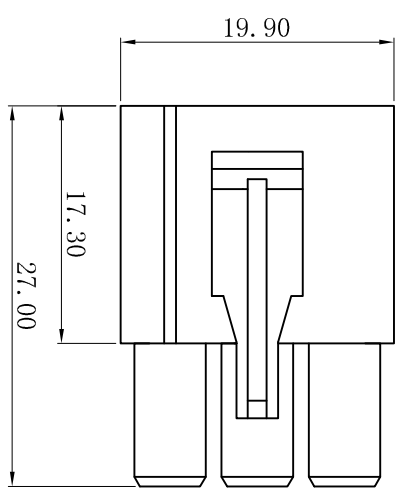

H6201-2x03P

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd	
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军		单位 Unit		品名 (PART NAME)	
变更图览格式内容		2013-12-27		陈雄军		审核/CHECK		胡进		比例/Scale		L6, 20mm Male Housing	
新版本		2011-05-24		陈雄军		批准/APPRO		MR. feng		大小/Size		Connector Series	
说明		日期		承认		日期/DATE		2015-11-04		页码/Sheet		料号 (PART NO)	
DESCRPTION		DATE		APPRO.						版本/Rev		H6201-2xNP	
版次												状态码	
REV.												C	

1 2 3 4 5 6 7 8 9 10