
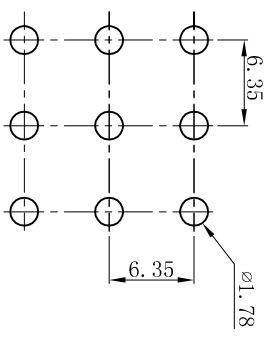
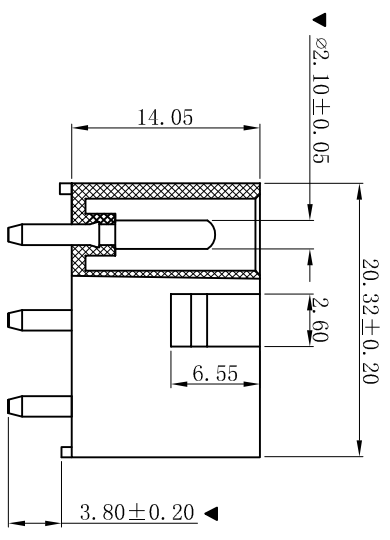
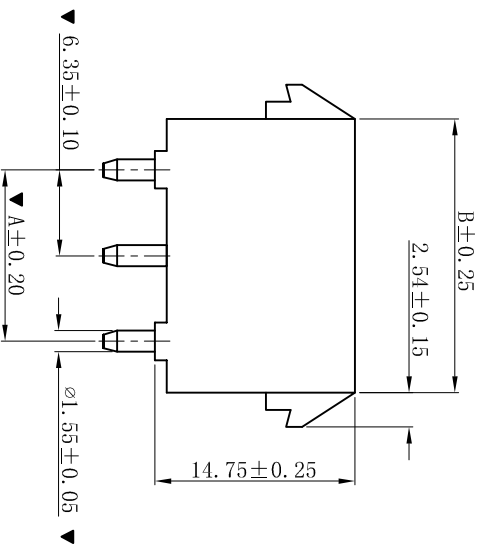



RoHS

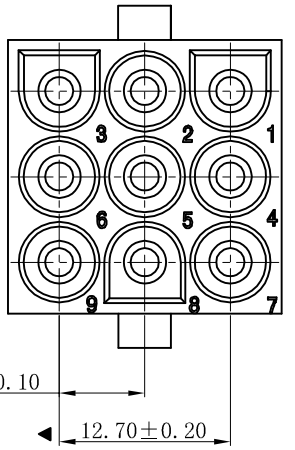

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

Poles	Dimensions (mm)	
	A	B
3x02	6.35	13.97
3x03	12.70	20.32
3x04	19.05	26.67
3x05	25.40	33.02

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 10mΩ max

■ WAFER

- Part No. : W6352V-3xNP
- Poles : 06-15P
- Housing Material : PA66 UL94V-2 or 94V-0
- Pin Material : Brass
- Contact Area Plating : Tin-Plated
- The Dimension Marked "▲" Must Be Recorded

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.05 ANGLE: ±1°	投影法 Projection 单位 Unit MM	品名 (PART NAME) 6.35mm 180° Wafer Connector Series	料号 (PART NO) W6352V-3xNP	状态码 C
C	修订版本	2015-11-04	陈雄军		审核/CHECK 陈雄军			
B	变更图宽格式内容	2013-12-27	陈雄军		核准/APPRO 胡进			
A	新版本	2011-05-24	陈雄军		日期/DATE 2019-06-03			
H	说明 DESCRPTION		承认 APPRO.					
1	版次 REV.							

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd