

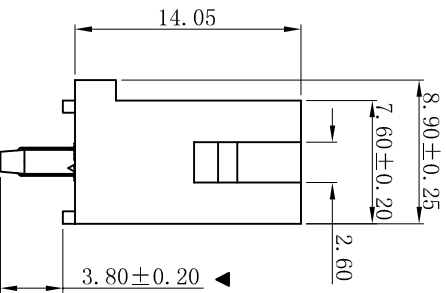
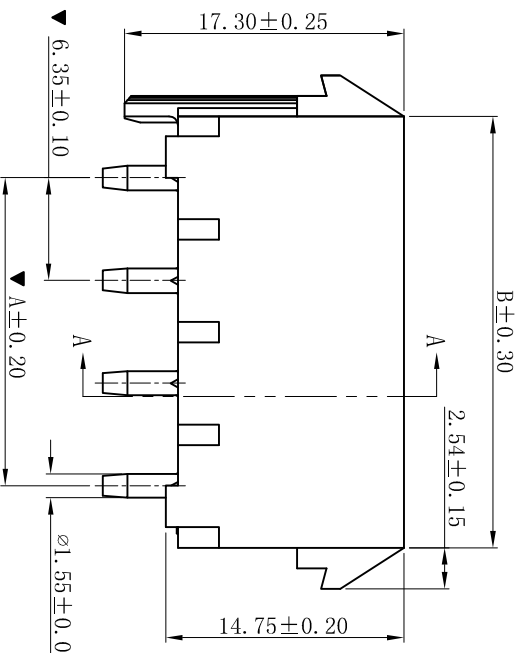



RoHS

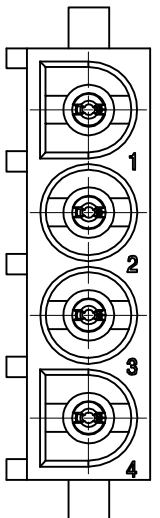

SECTION: A-A

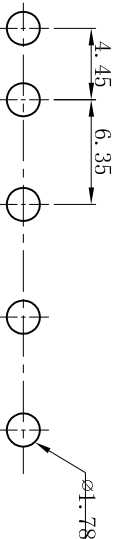

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W6352VD-NP-M
- Poles : 02-08P
- Housing Material : PA66 UL94V-2 or 94V-0
- Pin Material : Brass
- Contact Area Plating : Tin-Plated
- The Dimension Marked “▲” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
08	44.45	52.07

D	更新图面	2019-06-03	陈雄军	更新图面
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次 RRV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
1	1	2	3	4

一般公差	±0.30	绘图/DR	陈雄军
GENERAL TOLERANCE:	.00±0.25	审核/CHECK	陈雄军
	.000±0.20	核准/APPRO	胡进
	.000±0.05	日期/DATE	2019-06-03
ANGLE: ±1°			

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影	品名 (PART NAME)	6.35mm 180° Male Wafer
单位 Unit	MM	料号 (PART NO)	W6352VD-NP-M
比例/Scale	1:1	版本号	D
大小/SIZE	A4	页码/SHEET	1/1
页码/SHEET	1/1	版本号	D