



ROHS

19.20±0.20

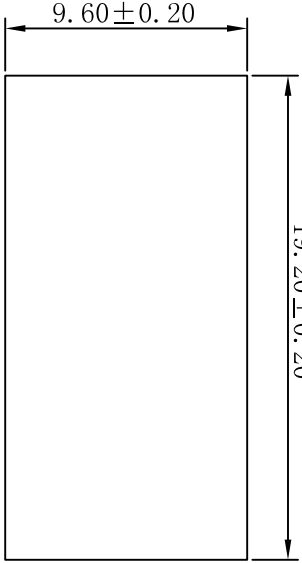


F5081GV

3.40




- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 10A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : F5081GX
 - Housing Material: Nylon66 UL94V-0

19.40±0.20

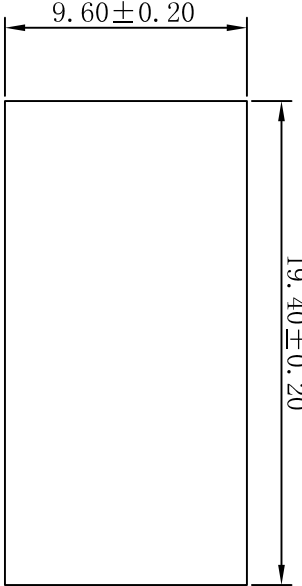

F5081GR

3.40

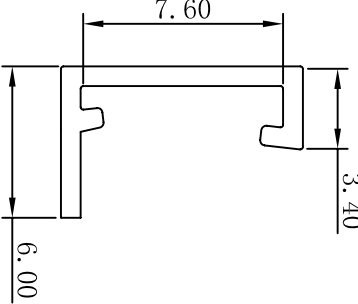

修订版本		2015-11-04		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°		投影法 Projection		品名 (PART NAME)		MX5, 08mm 刺破式主体盖子 Connector Series	
变更图章格式内容		2013-12-27		陈雄军		绘图/DR		陈雄军		单位 Unit		MM			
新版本		2011-05-24		陈雄军		审核/CHECK		胡进		比例/Scale		1:1			
说明		日期 DATE.		承认 APPRO.		核准/APPRO		MR. Feng		大小/SIZE		A4		料号 (PART NO)	
版次 REV.		DESCRIPTION				日期/DATE		2015-11-04		页码/SHEET		1/1		F5081GX	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd