


- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- HOUSING**
- Part No.: H4201-2xNP-XX
 - Poles: 02-24P
 - Housing Material: Nylon66 UL94V-2 or UL94V-0
 - Mates With: H4202 and W4202 dual row connectors
 - Use With: T4202 terminals
 - The Dimension Marked "▲" Must Be Recorded

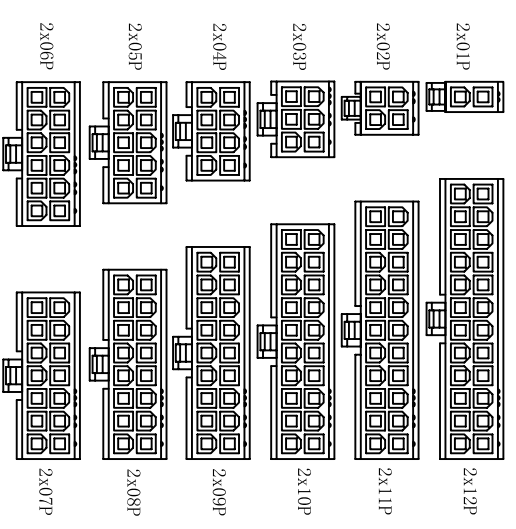

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	—	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.00±0.25
.000±0.05
ANGLE: ±1°

投影法
Projection
单位 Unit
MM

品名
(PART NAME)
MX4, 20mm Male Housing
Connector Series

料号
(PART NO)
H4201-2xNP-XX

修订版本	2015-11-04	陈雄军
变更图章格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE.	APPRO.

绘图/DR	陈雄军
审核/CHECK	胡进
核准/APPRO	MR. Feng
日期/DATE	2015-11-04

版次	1
REV.	1