RoHS

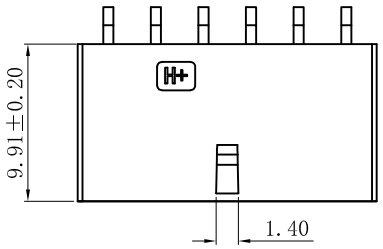

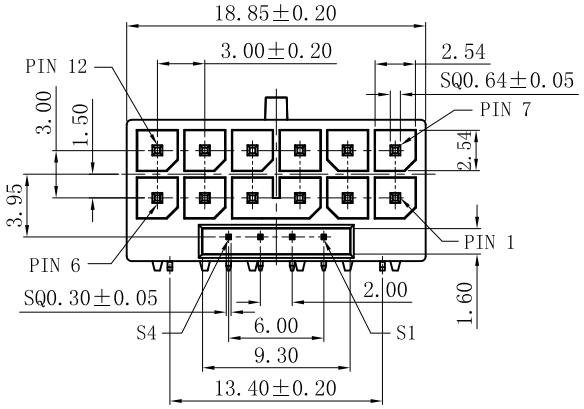

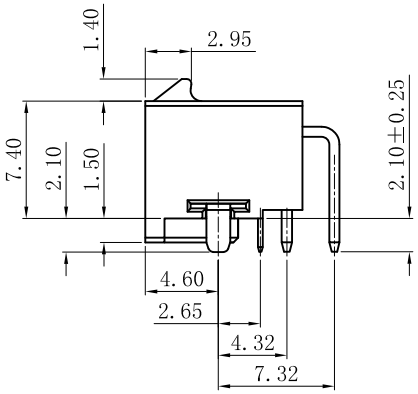

NOTE:

1. MATERIAL:
   INSULATOR: PA9T UL94V-0,BLACK.
   PWR & GND PIN: C1100
   SENSE PIN: C2680
   BOARD LOCK: SUS201
2. FINISH:
   CONTACT: 80u″ Min MATTE TIN PLATED OVERALL,30u″ Min NICKEL UNDER PLATED.
3. ELECTRICAL CHARACTERISTICS:
   CURRENT RATING: 9.2A PER PIN(PWR & GND PIN)
   DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC 1 MINUTE
   INSULATION RESISTANCE: 1000MΩ MIN.AT 500V/DC
   CONTACT RESISTANCE: 10mΩ MAX
   TEMPERATURE RANGE: -40° C~+105° C
4. MAX.PROCESSING TEMP: 230° C FOR 60 SECONDS.
   260° C FOR 10 SECONDS.
5. PART MUST BE ROHS COMPLIANT TO NTK SIPECIFICATION





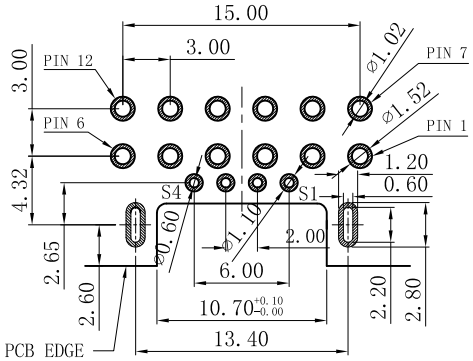

RECOMMEND P.C.B LAYOUT
TOLERANCE: ±0.05(TOP VIEW)

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STABLE
S2	CARD_CBL_PRES#
S3	SENSEO
S4	DO NOT USF

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
A	新版本	2022-01-18	PH.Duan

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2022-01-18

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	Molex 3.0mm PCI-E 12+4P 90° ¾P连孔沉板 Wafer Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W3045RLK-12+4P-9TBK
页码/SHEET	1/1		状态码 C
版本/Rev	A		