



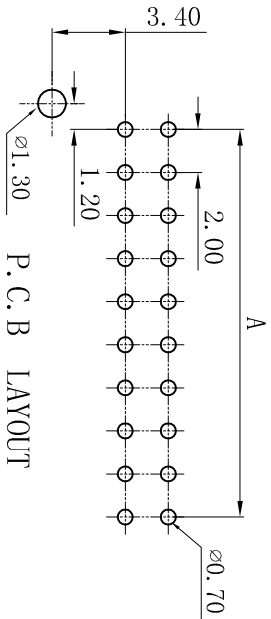
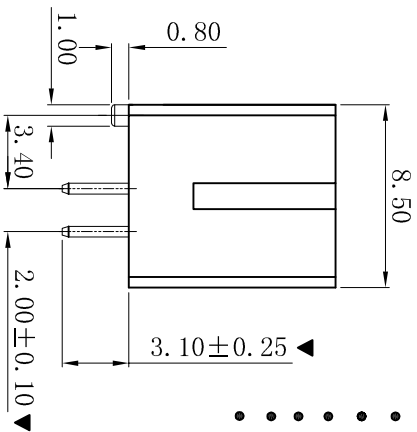
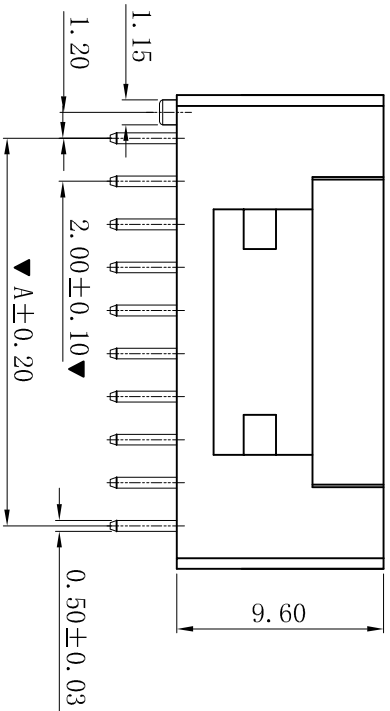


ROHS

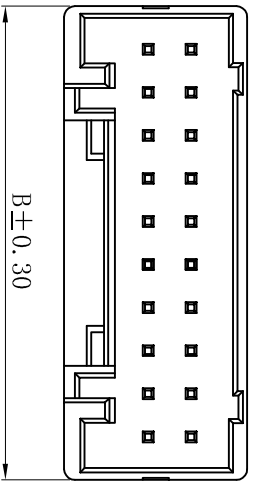

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W2018VD-2xNP
 - Poles : 08-40P
 - Housing Material : PA66 UL94V-0
 - Pin Material : Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connector's CO., Ltd

一般公差
 GENERAL TOLERANCE:
 0±0.30
 .00±0.25
 .000±0.05
 ANGLE: ±1°

投影法
 Projection
 单位 Unit
 MM
 比例/Scale
 1:1
 大小/Size
 A4
 页码/SHEET
 1/1
 版本/Rev
 A

品名
 (PART NAME)
 PUD 2.00mm 180° 带柱Wafer
 Connector Series

料号
 (PART NO)
 W2018VD-2xNP
 状态码
 C

绘图/DR
 审核/CHECK
 批准/APPRO
 日期/DATE


陈雄军
 陈雄军
 胡进
 2021-10-15
 2021-10-15

新版本
 说明
 DESCRIPTION

版次
 REV.
 1

1 2 3 4 5 6 7 8 9 10

ROHS

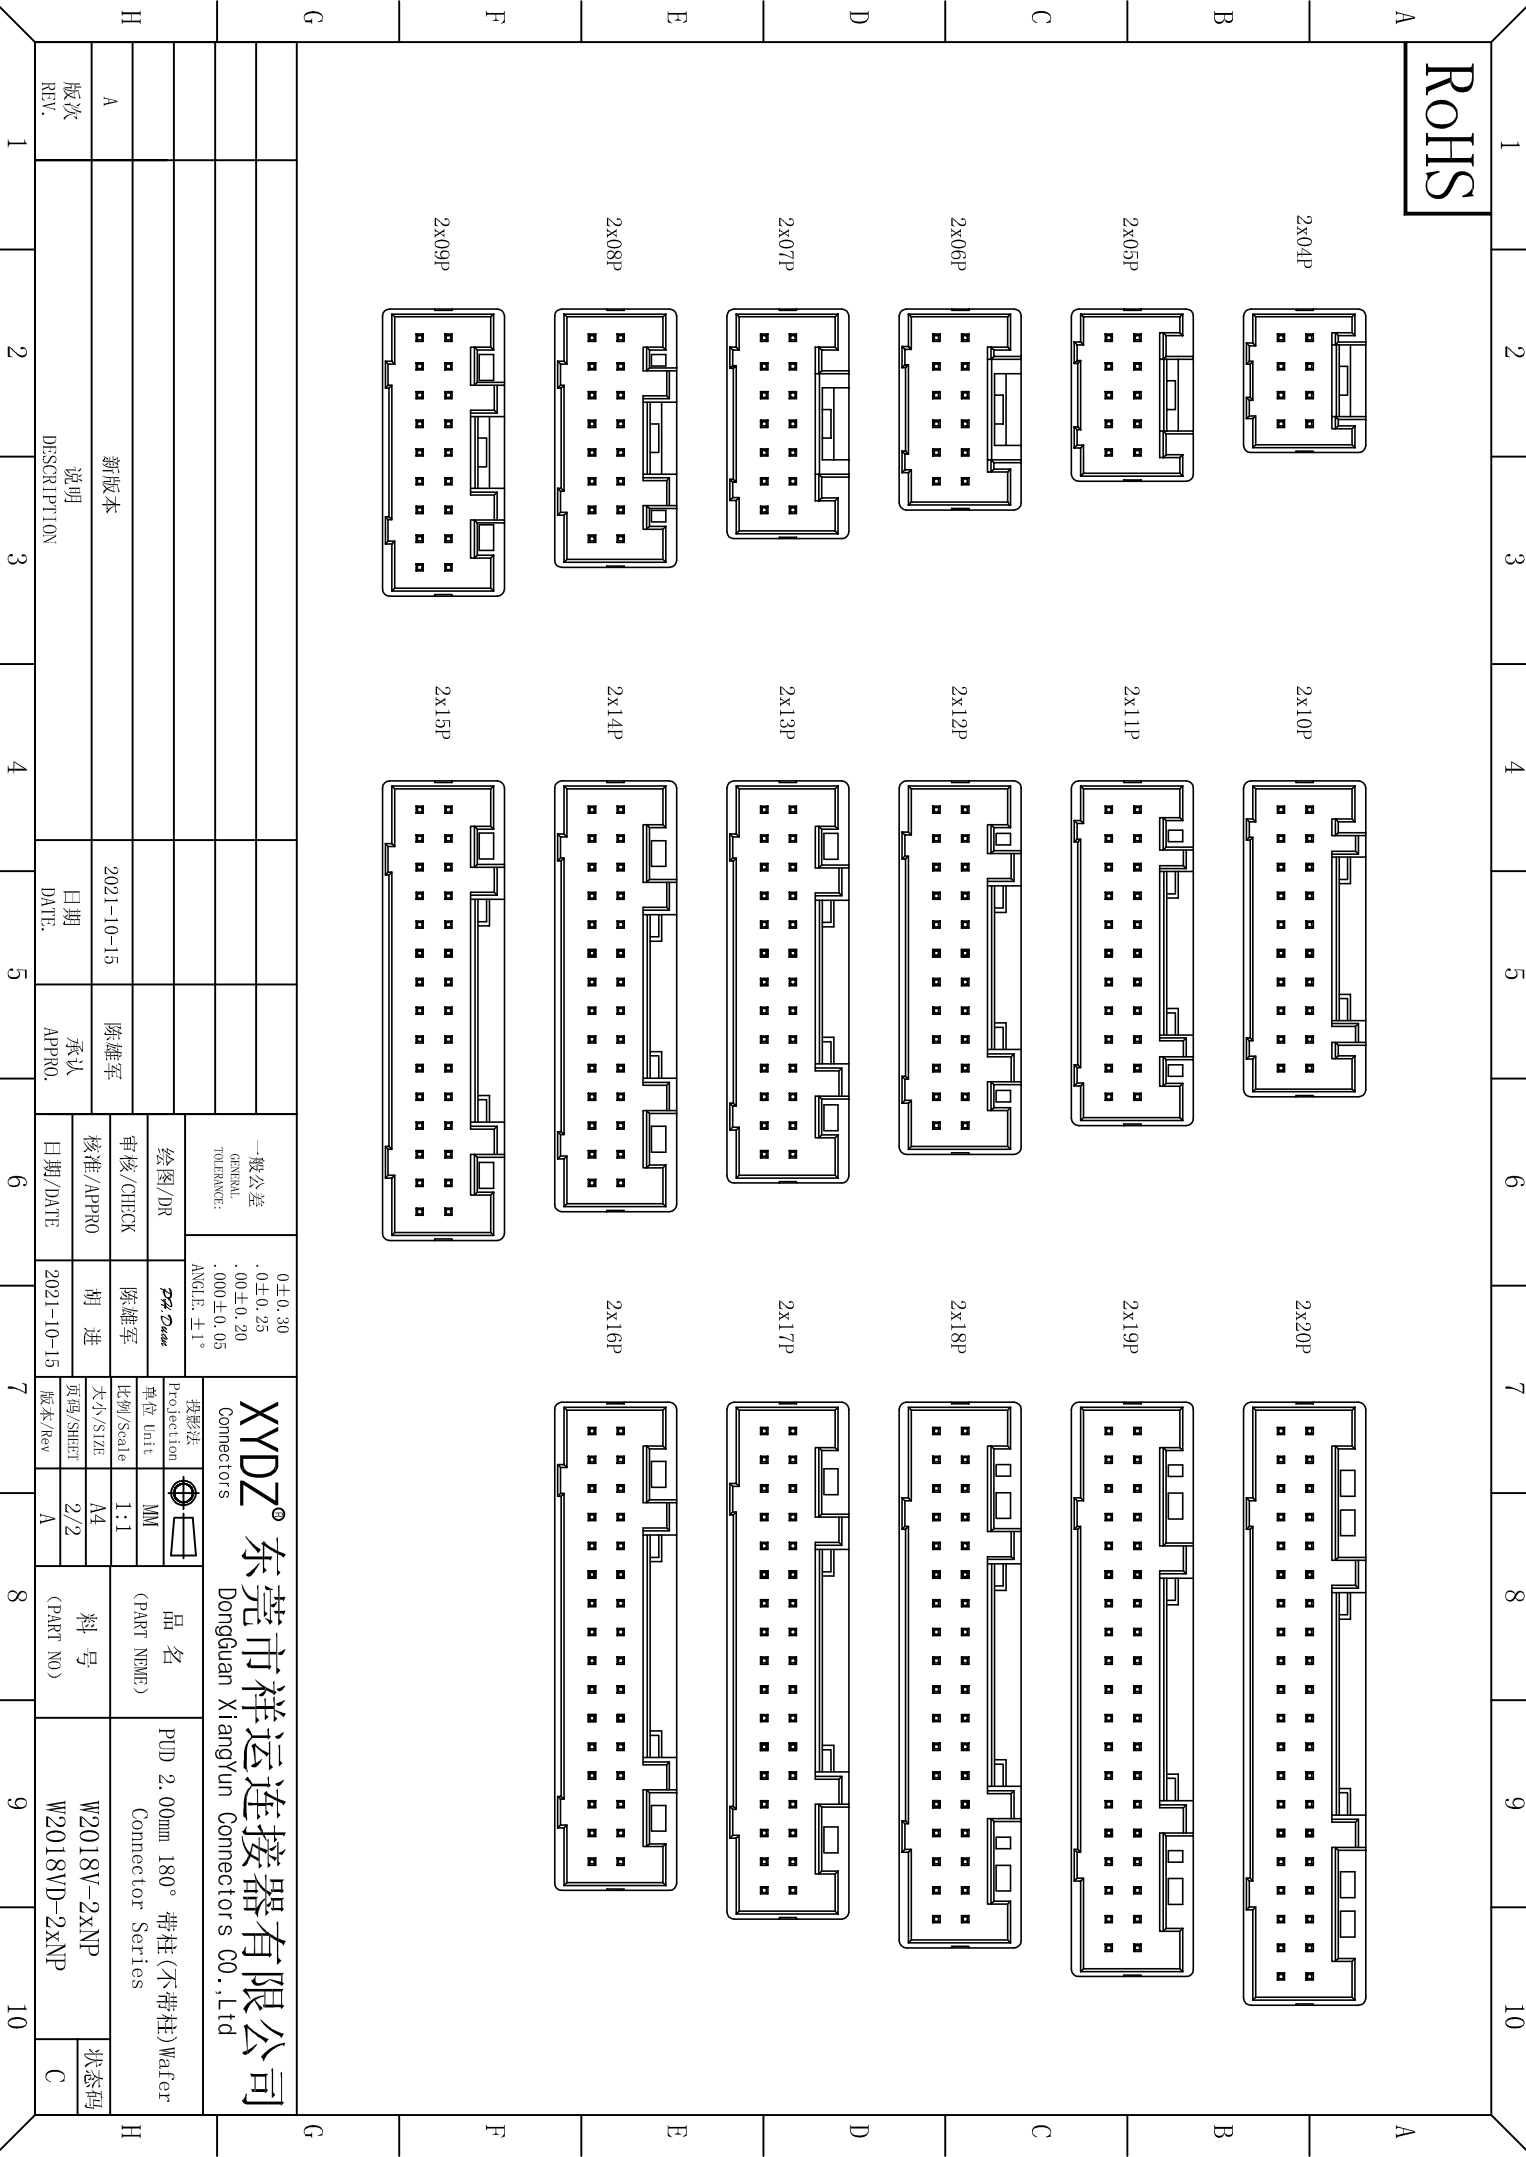

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors Co., Ltd

一般公差
 GENERAL TOLERANCE:
 0±0.30
 .00±0.25
 .000±0.20
 ANGLE: ±1°

投影法
 Projection
 MM

品名
 (PART NAME)
 PUD 2.00mm 180° 带柱(不带柱)Water
 Connector Series

绘图/DR
 审核/CHECK
 批准/APPRO
 日期/DATE

单位 Unit
 比例/Scale
 大小/Size
 页码/SHEET

料号
 (PART NO)
 W2018V-2xNP
 W2018VD-2xNP

陈雄军
 陈雄军
 胡进

2021-10-15
 2021-10-15

状态码
 C

说明
 DESCRIPTION
 新版本
 日期
 DATE
 承认
 APPRO.

版本
 REV.
 1

1
2
3
4
5
6
7
8
9
10

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H