
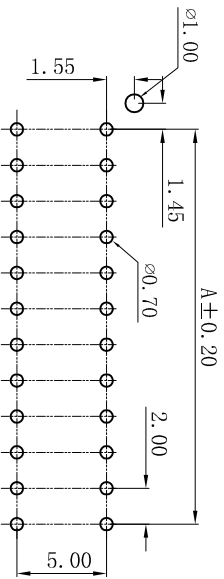
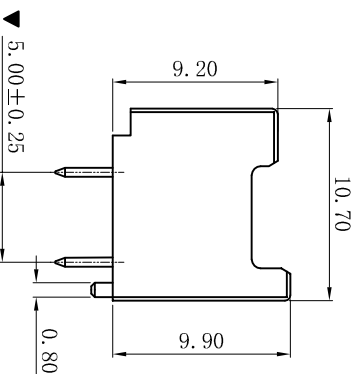
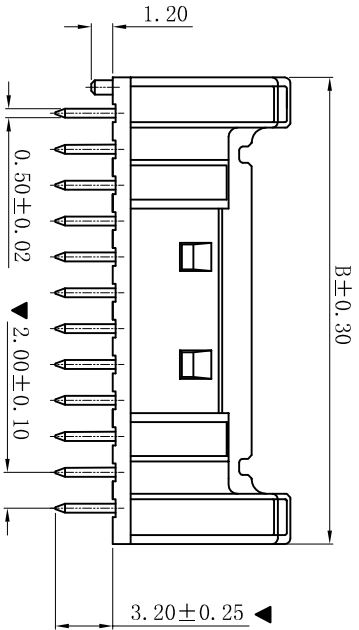


RoHS

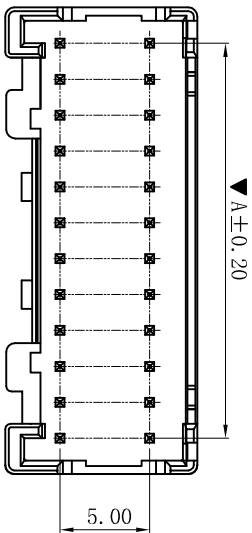

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2022V-2xNP
- Poles : 08-42P
- Housing Material : PA66 UL94V-0
- Pin Material : Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00
2x21	40.00	44.00

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差
 GENERAL TOLERANCE:
 ANGLE: ±1°

绘图/DR
 审核/CHECK
 批准/APPRO

投影法
 Projection
 单位 Unit
 比例/Scale

品名 (PART NAME)
 PND 2.00mm 180° Wafer
 Connector Series

日期/DATE
 日期 DATE: 2022-02-16
 承认 APPRO. 陈雄军

日期/DATE
 日期 DATE: 2022-02-16
 承认 APPRO. 胡进

料号 (PART NO)
 W2022V-2xNP
 版本号
 A
 状态码
 C

说明 DESCRIPTION	新版本	日期 DATE:	2022-02-16	承认 APPRO.	陈雄军
版次 REV.	A	日期 DATE:		承认 APPRO.	

1 2 3 4 5 6 7 8 9 10