
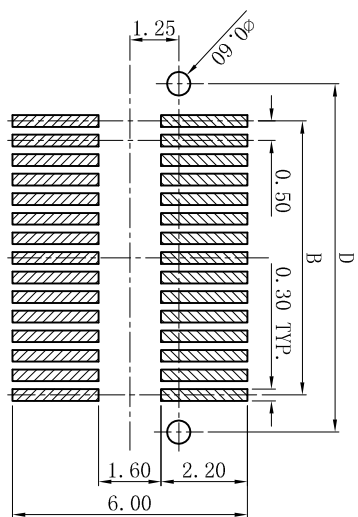


ROHS



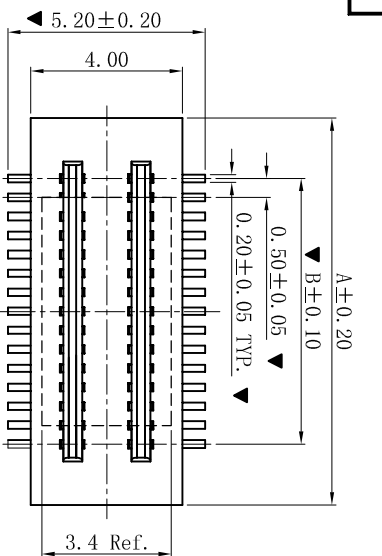


P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

NOTES:

1. Housing: High-Temp Thermoplastic, UL94V-0 Color: White.
2. Terminal: Phosphor Bronze.
Plating: Gold Flash - Plated,
Nickel 50u"~100u" - Plated.
3. The Dimension Marked "▼" Must Be Recorded

MATING HEIGHT	3.0	3.5	4.0	4.5	5.0	5.5	6.0
MALE H1	0.85	1.35	1.85	0.95	1.45	1.95	2.45
FEMALE H2	2.05		3.45				
MALE H2	2.20	2.70	3.20	2.85	3.35	3.85	4.35

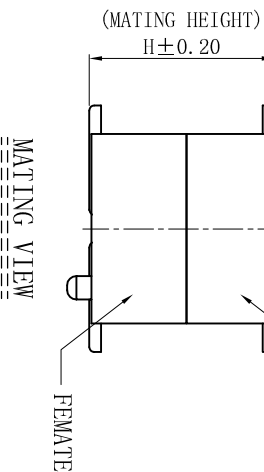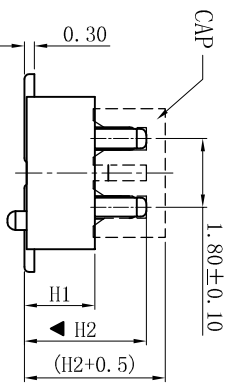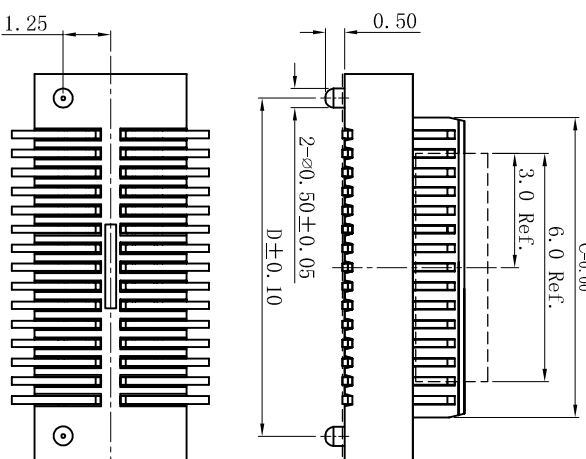

G

Part No	Dimensions (mm)				Part No	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2x04	4.7	1.5	2.4	3.4	2x18	11.7	8.5	9.4	10.4
2x05	5.2	2.0	2.9	3.9	2x19	12.2	9.0	9.9	10.9
2x06	5.7	2.5	3.4	4.4	2x20	12.7	9.5	10.4	11.4
2x06	6.2	3.0	3.9	4.9	2x21	13.2	10.0	10.9	11.9
2x07	6.7	3.5	4.4	5.4	2x22	13.7	10.5	11.4	12.4
2x08	7.2	4.0	4.9	5.9	2x23	14.2	11.0	11.9	12.9
2x09	7.7	4.5	5.4	6.4	2x24	14.7	11.5	12.4	13.4
2x10	8.2	5.0	5.9	6.9	2x25	15.2	12.0	12.9	13.9
2x11	8.7	5.5	6.4	7.4	2x26	15.7	12.5	13.4	14.4
2x12	9.2	6.0	6.9	7.9	2x27	16.2	13.0	13.9	14.9
2x13	9.7	6.5	7.4	8.4	2x28	16.7	13.5	14.4	15.4
2x14	10.2	7.0	7.9	8.9	2x29	17.2	14.0	14.9	15.9
2x15	10.7	7.5	8.4	9.4	2x30	17.7	14.5	15.4	16.4
2x16	11.2	8.0	8.9	9.9					

更新图面		2019-06-03		段平会		段平会		2019-06-03	
新版本		2018-08-14		段平会		胡进		2019-06-03	
说明		日期		承认		日期/DATE		2019-06-03	
版次		DESCRIPTION		APPRO.		日期/DATE		2019-06-03	
REV.		1		2		3		4	

XYDZ® 东莞市祥运连接器有限公司
Connectors
Dongguan XiangYun Connectors CO., Ltd

投影法	第一角	品名	0.50mm Pitch B TO B Male Connector	
单位 Unit	MM	(PART NAME)		
比例/Scale	1:1	料号	W05055V-2xNP-M	
大小/Size	A4	(PART NO)		
页码/SHEET	1/1	状态码	C	
版本/Rev	B			